



2018 Annual Air Quality Progress Report for Bridgend County Borough Council

In fulfillment of Part IV of the Environment Act 1995
Local Air Quality Management

August 2018



Local Authority Officer	Craig Lewis
Department	Shared Regulatory Services
Address	Public Protection Legal and Regulatory Services Bridgend County Borough Council Civic Offices Angel Street Bridgend CF31 4WB
Telephone	
e-mail	cralewis@valeofglamorgan.gov.uk
Report Reference number	Air Quality Progress Report 2018
Date	17/08/2017



Executive Summary: Air Quality in Our Area

Air Quality in Bridgend County Borough Council (BCBC)

Local authorities have a statutory duty under Part IV of the Environment Act 1995 & Air Quality Strategy for England, Scotland, Wales and Northern Ireland 2007 to manage local air quality. The Local Air Quality Management (LAQM) process places an obligation on all local authorities to regularly review and assess air quality in their areas, and to determine whether or not air quality objectives are likely to be achieved.

The air quality objectives applicable to LAQM in Wales are set out in the Air Quality (Wales) Regulations 2000, No. 1940 (Wales 138) and Air Quality (Amendment) (Wales) Regulations 2002, No 3182 (Wales 298). Where the air quality reviews indicate that the air quality objectives may not be met the local authority is required to designate an Air Quality Management Area (AQMA). Action must then be taken at a local level and outlined in a specific Air Quality Action Plan (AQAP) to ensure that air quality in the identified area improves.

In line with the Local Authorities' statutory duties under Part IV of the Environment Act 1995, Shared Regulatory Services (SRS) on behalf of BCBC undertakes regular air quality monitoring at specifically allocated locations across Bridgend using automated and non-automated principles for ambient air nitrogen dioxide (NO₂), particulate matter (PM₁₀) & sulphur dioxide (SO₂).

With regards to prioritising ambient air quality sampling locations, the Council adopts a risk based approach to any allocation of monitoring sites, considering the requirements of The Department for Environment, Food and Rural Affairs' (Defra) Local Air Quality Management Technical Guidance 16, February 2018 (previously April 2016). The designated monitoring locations are assigned based on relevant exposure and where the certain Air Quality Objective levels for a particular pollutant applies. TG(16) states that annual mean objectives should apply at "All locations where members of the public might be regularly exposed. Building facades of residential properties, schools, hospitals, car homes etc."

Automatic Monitoring Sites- BCBC has two automatic air quality monitoring sites which are located at Ewenny Cross Roundabout and Rhiwceilog (Rockwool Ltd). The sites monitor on a 24/7 basis measuring levels of NO₂, PM₁₀ & SO₂.

In October 2017, due to continued compliance for SO₂, following permissions from SRS on behalf of BCBC and NRW, Rockwool Ltd has relocated its SO₂ monitor to the vestry of Soar Chapel, Rhiwceiliog.

Non-automatic Monitoring Sites- In 2017 BCBC operated 30 specifically allocated non automatic monitoring sites in Bridgend which monitor levels of Nitrogen Dioxide (NO₂).

The 2017 Annual Progress Report (APR) outlined that the NO₂ non-automatic monitoring network utilised in Bridgend had been expanded for 2017. Ten additional non-automatic NO₂ monitoring locations were commissioned based on known areas of particularly elevated traffic flows, introduction of traffic management systems and foreseeable development, all with nearby relevant exposure. These newly commissioned sites included Park Street, Coity Road, Cowbridge Road and Bridgend Town Centre's Market Street.

Previous annual LAQM reporting for Bridgend has highlighted continued compliance with national air quality objectives as prescribed in the Air Quality (Wales) Regulations 2000 and the Air Quality (Amendment) (Wales) Regulations 2002. Therefore there have been no requirements to implement any Air Quality Management Areas (AQMA) in Bridgend. However, since the commissioning of ten non-automatic NO₂ monitoring locations in 2017, a review of the yearly datasets indicate elevated and exceeding annual average levels of NO₂ at sensitive receptor locations along Park Street, Bridgend. **Figure 1.1** illustrates the locations of the Park Street monitors in 2017.

Figure 1.1- 2017 NO₂ Diffusion Tube Monitors Park Street



The two NO₂ monitoring locations situated on Park Street highlight elevated and exceeding annual average levels of NO₂ when compared to the annual average NO₂ objective set at 40µg/m³;



OBC-103- 39 Park Street (37.6µg/m3)

OBC-104- 51 Park Street (41.5µg/m3)

Despite the highlighted area of concern, compliance with the air quality objectives was achieved at all other monitoring locations.

At the time of writing this report, BCBC's network of NO₂ diffusion tubes has been assessed, whereby the network has been expanded to encapsulate a wider foot print of Bridgend. Existing monitoring locations have also been amended and improved to represent worse case exposure. The new areas of monitoring now include Pencoed and Porthcawl and therefore results from these areas will be examined and reported in BCBC's 2019 APR.

SRS & BCBC recognises that in order to tackle these known pockets of poor air quality, a more suitable and constructive approach is required to target the whole of Bridgend, improving overall air quality. With the implementation of correct long term measures, highlighted road networks and identified areas of concern should be able to benefit from improved air quality. The recent Welsh Government guidance on local air quality management recommended two clear goals:

- (1) achieve compliance with the national air quality objectives in specific hotspots and
- (2) reduce exposure to pollution more widely, so as to achieve the greatest public health benefit.


Collective efforts, therefore, should look beyond targeted action in localised air pollution hotspots and do this in parallel with universal action to reduce risks for everyone.

In sight of these aspirations SRS & BCBC adopts the principles of The Well-being of Future Generations (Wales) Act 2015. The Act is a significant enabler to improve air quality as it calls for sustainable cross-sector action based on the principles of long-term, prevention-focused integration, collaboration and involvement. It intends to improve economic, social, environmental and cultural well-being in Wales to ensure the needs of the present are met without compromising the ability of future generations to meet their own needs. The Act places responsibilities on public bodies in Wales to work in new ways (including via Public Services Boards) towards national Well-being goals. Progress is measured against a suite of well-being and Public Health Outcomes Framework indicators; there is one specifically concerned with air pollution.

As **Figure 1.2** illustrates below, the Act is the legislative vehicle for "Health in all Policies in Wales" and provides the underpinning principles for all policy and decision making, including economic

development, in Wales. Reducing air pollution, health risks and inequalities can help contribute to most, if not all, of the well-being goals. As such, the Act presents excellent opportunities to change policy and practice to enhance air quality management arrangements across Bridgend (and wider).

Figure 1.2- The Well- being of Future Generations (Wales) Act 2015 Matrix

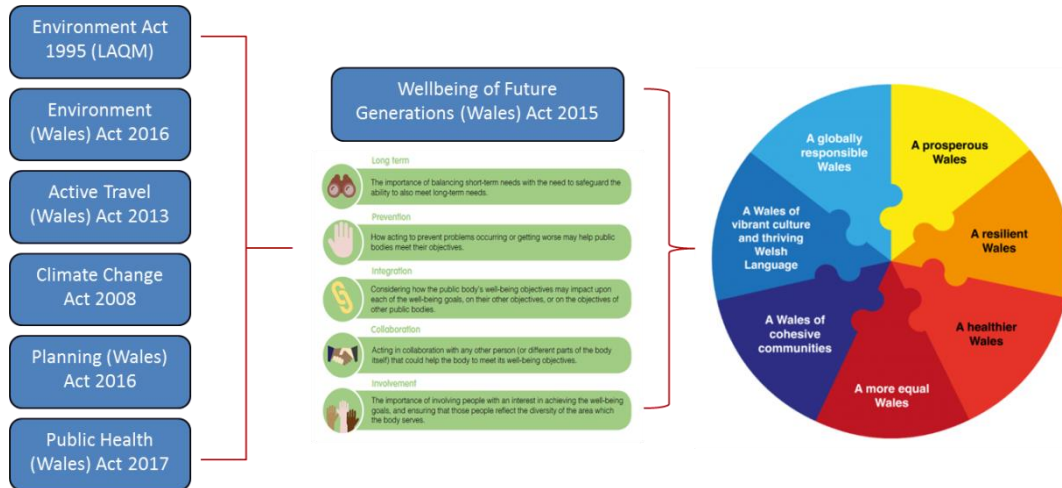

Actions to Improve Air Quality

To date BCBC has not declared an AQMA, therefore no further action was required to address air quality management. SRS & BCBC, in accordance with Welsh Government’s (WG) Local Air Quality Management Policy Guidance, July 2017, looked to improve its monitoring capability and strengthen the datasets captured in 2017. As referenced in the policy guidance;

“the national air quality objectives are not ‘safe’ levels of air pollution. Rather they represent a pragmatic threshold above which government considers the health risks associated with air pollution are unacceptable.”

As mentioned, in an effort to broaden its air quality understanding BCBC acquired additional non-automatic NO₂ monitoring sites in 2017 and also recently in 2018 amended and improved the network.

It was also noted in the 2017 APR that quality issues were apparent with the automatic monitoring station installed at Ewenny Cross Roundabout. Due to staffing requirements routine calibrations needed every two weeks, as per the requirements of LAQM TG(16), Section 7.170 were unable to be fulfilled. This consequently impacted the ability to undertake a site specific co-location study. In October 2017, the Specialist Services Team acquired additional staff resource to assist with local air quality monitoring. Unfortunately this position only came into place in the later part of the year, whereby inconsistency with calibrations was prevalent for much of 2017.


Local Priorities and Challenges

Based on the 2017 figures, under Part IV of the Environment Act 1995 & Air Quality Strategy for England, Scotland, Wales and Northern Ireland 2007, according to the statutory requirements of LAQM a DRAFT Air Quality Action Plan (AQAP) must be implemented within 18 months of declaring an AQMA. In accordance with WG's Policy Guidance for LAQM;

4.12 A draft action plan must be produced for review by the Welsh Government within 18 months of the coming-into-force date of the AQMA order, and the action plan must be formally adopted before two years have elapsed. A Local Authority failing to produce a draft action plan for review by the Welsh Government within two years of declaring or extending an AQMA will, in the absence of a compelling explanation, be issued with a direction from the Welsh Ministers under section 85(3) of the 1995 Act.

During 2018, monitoring for NO₂ has been increased further along Park Street, with an additional two NO₂ monitoring sites implemented. **Figure 1.3** illustrates the current 2018 network of monitoring for Park Street including the additional two locations.

Figure 1.3- 2018 NO₂ Diffusion Tube Monitors Park Street

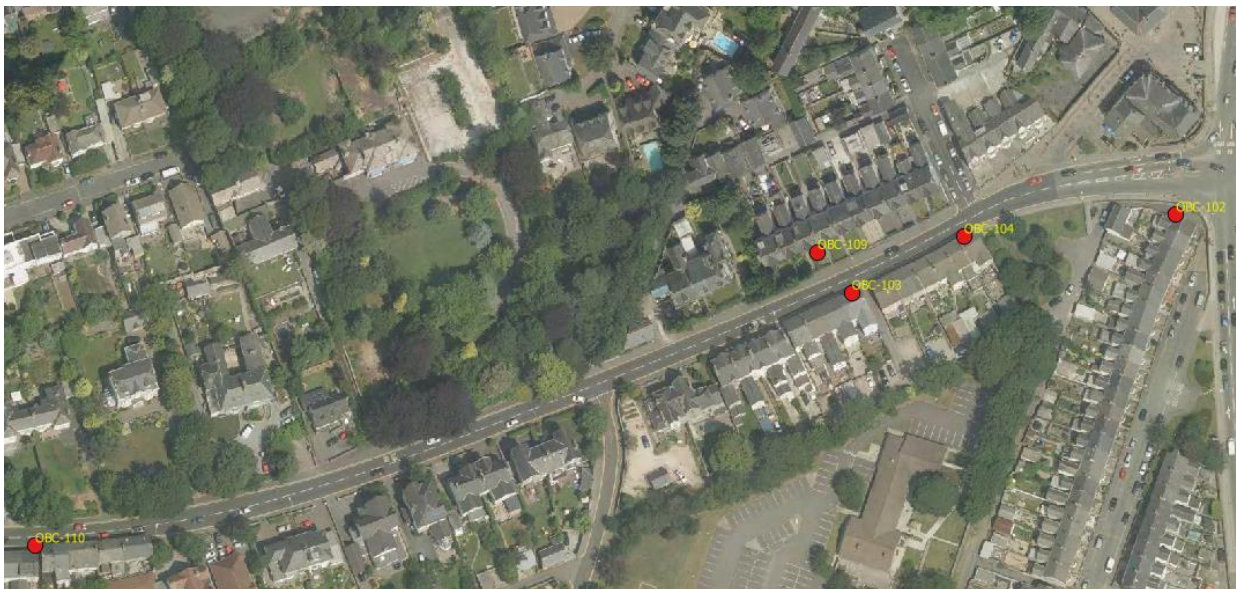

Although a full dataset is not available for 2018, it is evident that site **OBC-110**, situated at the residential facades of 101/103 Park Street, figures are elevated and there is the likelihood of exceedances of the air quality objectives set for NO₂.



In line with Welsh Governments Policy Guidance, following submission and approval of the 2018 Annual Progress Report, SRS & BCBC will need to legally declare an Air Quality Management Area (AQMA) for the Park Street Area, and this will be accompanied by an appropriate technical report setting out the reasons for the declaration.

Given that a number of residential properties will be included in the boundary of AQMA, SRS & BCBC will need to engage with these residents in a formal and effective communications exercise in order that the reasons and the implications of an AQMA can be adequately explained to them and the wider community as necessary.

Following the declaration of the AQMA, the Council will have up to 24 months to formalise an Action Plan in order to implement appropriate measures to try and improve/ reduce the NO₂ levels within the AQMA.

As part of the action plan a thorough understanding for air quality levels and trends will need to be gathered to inform any mitigation measures implemented. Therefore it is envisaged that the Ewenny Cross Roundabout automatic monitoring station will be installed in an appropriate location along Park Street which will measure NO₂ and PM₁₀. Progress has already started with the allocation of a new sampling location with site visits undertaken and acquiring a contracted service to support data handling and ratification. At the time of writing this report consultants have successfully started the data handling of data collected at Ewenny Cross Roundabout.

The development of a suitable action plan will require cross departmental working, especially from colleagues in Transportation, Highways and Planning.

In order to demonstrate the effectiveness of any proposed actions, detailed air quality and transport modelling will likely be required to support any decisions to implement the preferred action measures.

How to Get Involved

BCBC welcomes any correspondence relating to air quality enquiries or concerns. Shared Regulatory Services (SRS) Specialist Services Team represents BCBC for air quality and therefore is contactable via the webpage www.srs.wales/en/Home.aspx. Monthly average monitoring data for nitrogen dioxide (NO₂) is available at <https://airquality.gov.wales/>



Table of Contents

Executive Summary: Air Quality in Our Area	iii
Air Quality in Bridgend County Borough Council (BCBC).....	iii
Actions to Improve Air Quality.....	vi
Local Priorities and Challenges.....	vii
How to Get Involved.....	viii
1. Actions to Improve Air Quality	12
1.1 Previous Work in Relation to Air Quality.....	12
1.2 Air Quality Management Areas.....	18
1.3 Implementation of Action Plans.....	19
2. Air Quality Monitoring Data and Comparison with Air Quality Objectives	20
2.1 Summary of Monitoring Undertaken in 2017.....	20
2.1.1 Automatic Monitoring Sites.....	20
2.1.2 Non-Automatic Monitoring Sites.....	26
2.2 2017 Air Quality Monitoring Results.....	35
2.3 Comparison of 2017 Monitoring Results with Previous Years and the Air Quality Objectives.....	42
2.3.1 Nitrogen Dioxide (NO ₂).....	42
2.3.2 Particulate Matter (PM ₁₀).....	43
2.3.3 Sulphur Dioxide (SO ₂).....	43
2.4 Summary of Compliance with AQS Objectives as of 2017.....	43
3. New Local Developments	44
3.1 Road Traffic Sources (& other transport).....	44
3.1.1 Airports.....	44
3.1.2 Railways (Diesel and Steam Trains).....	44
Stationary Trains.....	44
Moving Trains.....	44
3.1.3 Ports (Shipping).....	44
3.2 Industrial / Fugitive or Uncontrolled Sources / Commercial Sources.....	45
3.2.1 New or Proposed Installations for which an Air Quality Assessment has been Carried Out.....	45
3.2.2 Existing Installations where Emissions have Increased Substantially or New Relevant Exposure has been introduced.....	45
3.2.3 New or Significantly Changed Installations with No Previous Air Quality Assessment.....	45
3.2.4 Major Fuel (Petrol) Storage Depots.....	45



3.2.5	Petrol Stations	45
3.2.6	Poultry Farms	45
3.3	Commercial and Domestic Sources	46
3.3.1	Biomass Combustion – Individual Installations.....	46
3.3.2	Biomass Combustion – Combined Impacts.....	46
3.3.3	Other Sources	46
3.3.4	Domestic Solid-Fuel Burning.....	46
3.4	New Developments with Fugitive or Uncontrolled Sources.....	46
3.5	Planning Applications	47
4.	Polices and Strategies Affecting Airborne Pollution	49
4.1	Air Quality Planning Policies.....	49
4.2	Local Transport Plans and Strategies.....	49
4.3	Active Travel Plans and Strategies	50
4.4	Local Authorities Well-being Objectives	51
4.5	Green Infrastructure Plans and Strategies.....	52
4.6	Climate Change Strategies.....	54
5.	Conclusions and Proposed Actions.....	55
5.1	Conclusions from New Monitoring Data.....	55
5.2	Conclusions relating to New Local Developments/ Sources	55
5.3	Other Conclusions.....	55
5.4	Proposed Actions	55
	References	57
	Appendices	58
	Appendix A: Monthly Diffusion Tube Monitoring Results	59
	Appendix B: A Summary of Local Air Quality Management	62
	Purpose of an Annual Progress Report.....	62
	Air Quality Objectives.....	62
	Appendix C: Air Quality Monitoring Data QA/QC	64
	Diffusion Tube Bias Adjustment Factors	64
	Short-Term to Long-Term Data Adjustment.....	65
	QA/QC of Diffusion Tube Monitoring.....	67
	Glossary of Terms	68

List of Tables

Table 2.1-	Details of Automatic Monitoring Sites
Table 2.2-	Details of Non-Automatic Monitoring Sites 2017
Table 0.1 –	Non-automatic Annual Mean NO ₂ Monitoring Results (2013- 2017)
Table 0.4 –	Automatic Annual Mean NO ₂ Monitoring Results (2013- 2017)
Table 2.5 –	Automatic 1-hour Mean NO ₂ Monitoring Results (2013- 2017)

Table 0.6 – Automatic Annual Mean PM₁₀ Monitoring Results (2013- 2017)
Table 0.7 – Automatic 24-Hour Mean PM₁₀ Monitoring Results (2013- 2017)
Table 0.8 – Automatic SO₂ Monitoring Results: Comparison with Objectives
Table A.1 – Full Monthly Diffusion Tube Results for 2017
Table B.1 – Air Quality Objectives Included in Regulations for the Purpose of LAQM in Wales
Table C.1 – Long term AURN sites used for calculation of NO₂ annualisation ratio for Ewenny Cross Roundabout AMS
Table C.2 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-069
Table C.3 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-101
Table C.4 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-049
Table C.5 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-050
Table C.6 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-106
Table C.8 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-080
Table C.7 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-087
Table C.9 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-081
Table C.10 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-082
Table C.11 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-083

List of Figures

Figure 1.1- 2017 NO₂ Diffusion Tube Monitors Park Street
Figure 1.2- The Well-being of Future Generations (Wales) Act 2015 Matrix
Figure 1.3- 2018 NO₂ Diffusion Tube Monitors Park Street
Figure 1.4- Envisaged AQMA boundary for Park Street AQMA
Figure 2.1- Map of Ewenny Cross Roundabout Automatic Monitoring Site
Figure 2.2- Map of Rockwool Automatic Monitoring Site (Original Location Cadairfarch Farm)
Figure 2.3- Map of Rockwool Automatic Monitoring Site (New Location- Vestry of Soar Chapel, Rhiwceiliog est October 2017)
Figure 2.4a– AREA A – Tondu Roundabout NO₂ Diffusion Tube Locations
Figure 2.4b– AREA B – Ewenny Cross Roundabout, A48 By-Pass NO₂ Diffusion Tube Locations
Figure 2.4c– AREA C – Nolton Street/ Ewenny Cross Link/ A473 Cowbridge Road NO₂ Diffusion Tube Locations
Figure 2.4d– Area D – Bridgend town Centre NO₂ Diffusion Tube Location
Figure 2.4e– Area E – Park Street NO₂ Diffusion Tube Locations
Figure 2.4f– Area F – Coity Road NO₂ Diffusion Tube Locations
Figure 2.4g– AREA G – Maesteg Town Centre NO₂ Diffusion Tube Locations
Figure 0.5 – Trends in Annual Mean NO₂ Concentrations
Figure 2.6- Bridgend PSB Four Well-being Objectives



1. Actions to Improve Air Quality

1.1 Previous Work in Relation to Air Quality

First Round of Review and Assessment

Between 1999 and 2001, Bridgend County Borough Council published reports corresponding to stages 1, 2 and 3 of the first round of review and assessment of air quality. Seven key pollutants were examined (carbon monoxide, benzene, 1,3-butadiene, lead, nitrogen dioxide, fine particles (PM₁₀) and sulphur dioxide). These assessments predicted no exceedences of any of the objectives. It concluded that in order to fulfil the requirements of the Environment Act 1995, air quality should be reviewed and assessed again in 2003.

Second Round of Review and Assessment

Following new technical and policy guidance issued by Defra, Bridgend County Borough Council published its first Updating and Screening Assessment in June 2003. Of the seven pollutants subjected to the updating and screening assessment process, it was concluded that the likelihood of the air quality objectives for carbon monoxide, benzene, 1,3-butadiene, lead and sulphur dioxide being exceeded was negligible and that it was not necessary to carry out a detailed assessment of any of these pollutants. However, the updating and screening assessment for nitrogen dioxide and PM₁₀ revealed gaps in the data gathered and concluded that there was evidence to suggest non-compliance with the air quality objectives for PM₁₀ and NO₂ at three locations resulting from road traffic emissions. It was suggested that there was a requirement to continue to a Detailed Assessment for the following locations;

- A48 Ewenny Cross, Bridgend
- The western end of Cowbridge Road, Bridgend
- The western end of the Bridgend Cross Valley Link Road.

In addition it was also recommended to carry out a co-location exercise to determine the bias correction for the passive nitrogen dioxide detector tubes provided and analysed by Severn Trent Laboratories.

In July 2005, Bridgend County Borough Council's Local Air Quality Management Progress Report recommended that;

-All currently held data should be, as far as possible, ratified.

-Data shall continue to be gathered from the three sites identified in the June 2003 USA to enable conclusions to be drawn on the current and future air quality at these locations. The results will be presented in a Detailed Assessment of Air Quality at these locations by 31st December 2005.

-The mobile PM₁₀ and NO_x monitoring station should be added to the Welsh Air Quality Forum Network of sites and receive appropriate Quality Assurance and Quality Control (QA/QC) to validate any data gathered.

In March 2006 a Detailed Assessment for Nitrogen Dioxide and Particles (PM₁₀) was produced in March 2006 and concluded that the current air quality objectives for nitrogen dioxide and particles PM₁₀ are being met and that the 2010 Air Quality Daughter Directive limit value for nitrogen dioxide will also be achieved at the three road junctions assessed. However, it also recommended that monitoring data from the three road junction sites identified in the June 2003 USA should continue to be gathered to enable assessment of future air quality at these locations.

Third Round of Review and Assessment

Bridgend County Council published its second USA in May 2006. The assessment concluded that there was no requirement to proceed to a detailed assessment for any pollutant in Bridgend County Borough.

The Council published Progress Reports in 2007 and 2008. Both reports coincided with one another, issuing similar conclusions and recommendations. They indicated that no air quality objectives prescribed in the Air Quality (Wales) Regulations 2000 and the Air Quality (Amendment) (Wales) Regulations 2002 will be breached at any relevant locations.

In terms of monitoring locations, the reports highlighted the following;

-Data on NO₂ concentrations will continue to be gathered at relevant locations adjacent to A48 Ewenny Cross, the western end of Cowbridge Road and at Tondu Road on the western end of the Bridgend Cross Valley Link Road.



-Monitoring of PM₁₀ and NO₂ will continue at Kenfig Hill adjacent to the opencast coal site operated by Celtic Energy Ltd.

-Monitoring of NO₂ and sulphur dioxide (SO₂) will take place at relevant locations adjacent to Rockwool Ltd, Wern Tarw, Pencoed when the new factory extension becomes operational.

Fourth Round of Review and Assessment

The Bridgend County Council published its third USA in June 2009. There was no evidence of any significant breaches of the air quality objectives prescribed in the Air Quality (Wales) Regulations 2000 and the Air Quality (Amendment) (Wales) Regulations 2002, at any relevant locations. The report did however draw attention upon an ongoing trend for NO₂ concentrations at Ewenny Cross, Bridgend, and Tondu Road, Bridgend, at the façade of the nearest houses, to be at or close to the air quality objective for NO₂ for 2007.” It was decided that monitoring would continue at the two highlighted sites as part of an ongoing Detailed Assessment to be produced later that year.

The 2010 Progress Report stated the following;

The conclusions for the new monitoring data in relation to Ewenny Cross and Tondu Rd show that Ewenny Cross has exceeded the annual mean National Air Quality Objective for nitrogen dioxide (NO₂) and this will be reported in depth in the Detailed Assessment to be produced later this year.

The results for nitrogen dioxide at Tondu Rd show that the annual mean National Air Quality Objective for nitrogen dioxide (NO₂) has not been exceeded. However, in view of the results which are very close to the objective, monitoring will continue at this location for at least another year.

There are no new local developments likely to give rise to a significant impact on air quality within the County Borough.

There are no other issues that give rise to concern in terms of impact on air quality within the County Borough.

The Detailed Assessment for Ewenny Cross is near completion and will be produced in May 2010.

A further progress report will be produced early in 2011.

The 2010 Detailed Assessment for Ewenny Cross was subsequently submitted and stated:

This Detailed Assessment of Air Quality has shown that the current air quality objectives for nitrogen dioxide (NO₂) are not being met at the south western sector of Ewenny Cross, Bridgend but are being met at the Bridgend Cross Valley Link, Tondu Road, Bridgend.

In view of the above, the following recommendations have been made:

-Monitoring should continue at its present level at the Bridgend Cross Valley Link, Tondu Road and at Ewenny Cross, Bridgend.

-A continuous monitor, together with a meteorological station, should be installed at or as near to the south western sector of Ewenny roundabout as is practical.

Following discussions with Welsh Assembly Government and UWE it was decided that the Detailed Assessment should remain ongoing and that any decision to declare an AQMA for Ewenny Cross should be delayed until continuous monitoring data for 2010 has been collated and analysed.

The 2011 Progress report stated the following:

Following the Detailed Assessment submitted in June 2010 and the response from WAG, the Authority decided, in consultation with WAG and UWE to defer a decision to declare an AQMA for Ewenny Cross until a full calendar year of continuous monitoring data had been collated and analysed.

Due to equipment failure and contractual issues, continuous monitoring at Ewenny Cross has been significantly delayed. Continuous sampling commenced in March 2011 as did a diffusion tube co-location study.

The conclusions from annualised monitoring data obtained since the last report show that one sampling point at Ewenny Cross has exceeded the annual mean National Air Quality Objective for nitrogen dioxide (NO₂). The other nine around the Cross remain within the annual mean National Air Quality Objective.

The results for nitrogen dioxide diffusion tube monitoring at Tondu Rd show that the National Air Quality Objective's annual mean for nitrogen dioxide (NO₂) has not been exceeded. However, results are very close to the objective and monitoring will continue at this location for another year.

No continuous PM₁₀ data could be retrieved for South Cornelly or Kenfig Hill due to equipment failure.

The nitrogen dioxide diffusion tube sampling locations in Maesteg town centre which were set up in July 2010 following local concerns have shown to date, an exceedance at one sampling point. As a result, more monitoring location points have been put in place and will be reported upon in the next USA report.

Fifth Round of Review and Assessment

Bridgend County Council published its fourth USA May 2012. In addition a Detailed Assessment was submitted for Ewenny Cross. The reports identified;

-There were no indications of any significant breaches of the air quality objectives prescribed in the Air Quality (Wales) Regulations 2000 and the Air Quality (Amendment) (Wales) Regulations 2002.

-There was an exceedance of the objective for Nitrogen Dioxide at one location in Maesteg. However, this was marginal and the other sample points in the immediate vicinity were below the National Objectives for Nitrogen Dioxide. Monitoring continued at this site and extra sample sites, in addition to those already in place were set up where practicable. The data so far for this location, in view of the above, does not suggest that a Detailed Assessment is necessary at this time, although this will be subject to review as more data is collected and analysed.

-The positioning of an Automated Continuous NO_x Analyser and co-location study at Ewenny Cross has provided robust information as to the air quality situation and indicates that Nitrogen Dioxide levels do not exceed the National Air Quality Objectives. This Automated Continuous NO_x Analyser will be retained at this site to gather more data over the coming year.

-The Detailed Assessment 2012 completed in tandem with this Report concluded that it is not necessary at this point in time to proceed with declaring an Air Quality Management Area at



Ewenny Cross. The situation will continue to be monitored by way of the co-location study utilising the Automated Continuous NO_x Analyser and the numerous Nitrogen Dioxide Diffusion Tube sites situated at the Cross

The 2013 Progress report provided the following findings and recommendations;

The Report has not identified a need to proceed to a Detailed Assessment for any pollutant.

The Report has identified a need to continue monitoring for Nitrogen Dioxide in Maesteg Town Centre.

Monitoring of Nitrogen Dioxide and PM₁₀ will continue at the same sites as at the end of 2012.

The Automated Continuous NO_x Analyser and co-location study will continue at Ewenny Cross Roundabout for this year to acquire more robust data. In the light of the acquired data, the positioning and possible relocation of the Automatic Monitoring Station will be decided at the end of 2013.

Bridgend County Borough Council will submit a Progress Report in May 2014.

The 2014 Progress report stated the following:

With the exception of Ewenny Cross Roundabout as highlighted above, the Progress Report has not identified a need to consider proceeding to a Detailed Assessment for any other pollutant.

Monitoring of Nitrogen Dioxide and PM₁₀ will continue at the same sites as at the end of 2013.

Bridgend County Borough Council will submit a progress report in May 2015.

Sixth Round of Review and Assessment

Bridgend County Council published its fourth USA September 2015. The assessment identified no need to proceed to a Detailed Assessment for any pollutant.

2016 Annual Progress Report highlighted no concerns and no objectives were exceeded.

2017 Annual Progress Report

BCBC's 2017 Annual Progress Report highlighted that air quality within Bridgend County Borough continued to meet the relevant air quality objectives as prescribed in the Air Quality (Wales) Regulations 2000 and the Air Quality (Amendment) (Wales) Regulations 2002.

Reporting described the amendments to the non-automatic NO₂ network with 10 new locations commissioned for 2017.

Quality and technical issues were outlined regarding the automatic monitoring at Ewenny Cross Roundabout, for both NO₂ and PM₁₀. The inability to conform to the frequency of calibration checks and technical issues faced with the PM₁₀ Met One E Sampler were noted. Data capture was also an issue at the Rockwool Ltd site for SO₂ monitoring, recorded at 47.1%.

1.2 Air Quality Management Areas

Air Quality Management Areas (AQMAs) are declared when air quality is close to or above an acceptable level of pollution (known as the air quality objective (Please see Appendix A)). After declaring an AQMA the authority must prepare a **DRAFT** Air Quality Action Plan (AQAP) within 18 months setting out measures it intends to put in place to improve air quality to at least the air quality objectives, if not even better. The AQAP must be **formally** adopted prior to 24 months has elapsed. AQMA(s) are seen by local authorities as the focal points to channel resources into the most pressing areas of pollution as a priority.

BCBC does not currently have any AQMAs implemented, however following a revision of the annual average NO₂ datasets an AQMA will need to be implemented. In line with Welsh Governments Policy Guidance following submission and approval of the 2018 Annual Progress Report, BCBC will need to legally declare an Air Quality Management Area (AQMA) for the Park Street Area, and this will be accompanied by an appropriate technical report setting out the reasons for the declaration.



1.3 Implementation of Action Plans

BCBC will adhere to the timeframes outlined within WG Policy Guidance, July 2017 ensuring that a DRAFT AQAP will be in place within 18 months of the formal declaration of the AQMA, and also a formalised AQAP with appropriate measures assessed is implemented within 24 months.

At this stage the nature of these measures is not certain but may entail some or all of the following:

- Junction/ traffic signal improvements with Tondu Road;
- Consideration of vehicle flow/ access restrictions;
- Wider transportation improvements across Bridgend to encourage more sustainable and active travel; and
- Improved monitoring, including real time capabilities, to enable more robust understanding of trends and levels of pollution;



2. Air Quality Monitoring Data and Comparison with Air Quality Objectives

2.1 Summary of Monitoring Undertaken in 2017

2.1.1 Automatic Monitoring Sites

Within the County Borough, there are two automatic monitoring location sites; Rhiwceilog and Ewenny Cross Roundabout.

The Rhiwceilog monitoring site is managed and maintained by Rockwool Ltd. Within the monitoring unit is an API AMX monitor capable of giving continuous fifteen minute averages of sulphur dioxide (SO₂) concentrations. Rockwool Environmental Officers have operated the continuous ambient SO₂ monitor since 2008/9. . The equipment is calibrated by an Environment Officer at Rockwool on a fortnightly basis and serviced and maintained by Enviro Technology on a six monthly basis. Data obtained is checked for validation and ratified by Rockwool's Environment Officer. In addition to this, the Rockwool environmental team manage 10 SO₂ diffusion tubes placed at 10 locations in the vicinity of the Rockwool Ltd site.

The location of the SO₂ automated monitor is shown in **Figure 2.2** and details of the site are contained in **Table 2.1**. Due to continued compliance with the SO₂ air quality objectives appointed officers from Rockwool Ltd, BCBC and NRW decided upon a new preferred location for the SO₂ automated monitoring station. On the 3rd October 2017 the monitoring was assigned to its new location in the vestry of Soar Chapel, Rhiwceilog. Please refer to **Figure 2.3** and **Table 2.1** for further details. Rockwool Ltd continues to operate the SO₂ diffusion tube locations, which satisfies the improvement programme requirement IP5V.

The Ewenny Cross Roundabout unit has been located at this site since 2011 following elevated levels of nitrogen dioxide recorded via diffusion tubes located within the area. The location of the site is shown in **Figure 2.1** and details of the site are contained in **Table 2.1**. Within the mobile station is an API NO_x analyser capable of providing continuous fifteen minute averages of nitrogen dioxide (NO₂) concentrations and a Met One E-Sampler PM₁₀ monitor.

The mobile station is also equipped with a meteorological station so that local weather data can be gathered for use in conjunction with the air quality data. The Ewenny Cross Roundabout air quality monitoring station is calibrated by a Local Authority Officer on a fortnightly basis and serviced and



maintained by an approved authorised contractor on a six monthly basis. Data obtained is checked for validation and ratified by a Local Authority Officer.

The Ewenny Cross Roundabout Automatic Monitoring Station (AMS) was unfortunately subjected to some quality and technical issues in 2017. The chemiluminescent NO_x Analyser had a total data capture of 27% and did not adhere to the calibration requirements outlined in LAQM (TG16), 7.170. It is specified that calibrations for roadside/ kerbside located monitors should be undertaken **every two weeks** by LAs. Unfortunately due to staffing requirements this was not adhered to. As a best practise approach, due to the inconsistency of LA calibrations an nitrogen dioxide (NO₂) co-location study was not undertaken and alternatively a national bias adjustment factor was obtained from the DEFRA website and applied to the NO₂ datasets. The bias adjustment figure was based on an average of 29 co-location studies, undertaken by various Local Authorities around the UK who had appointed the same analytical laboratory and analysis method as BCBC for the NO₂ diffusion tubes. In accordance with LAQM (TG16) the data from the NO_x Analyser has been annualised in accordance with box 7.9 and the 90.8th Percentile value has been given to examine the 1 hour objective.

Due to mechanical issues and technical data issues, the Met One E PM10 Sampler captured only 12% valid data in 2017. Therefore a NO RESULT (NR) value was given for PM10.

In addition to the above, it is also important to note that whilst the monitoring equipment obtained automatic data, it was not connected to the Automatic Urban & Rural Network (AURN) or Welsh Air Quality Network and no external QA/QC monitoring is currently being carried out at any of the sites.

Figure 2.1- Map of Ewenny Cross Roundabout Automatic Monitoring Site

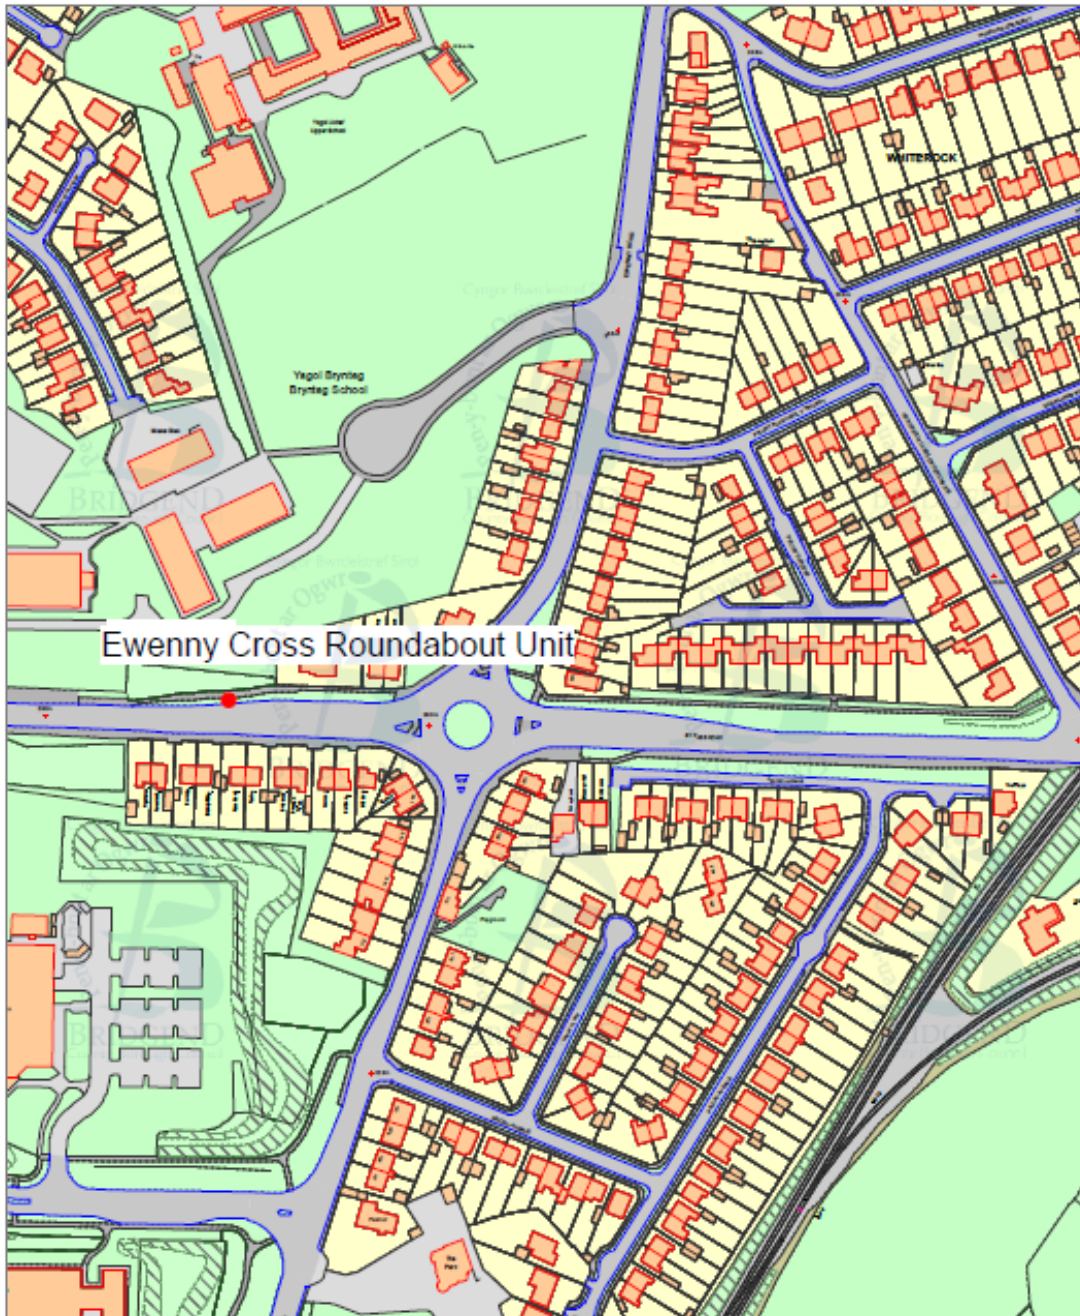


Figure 2.2- Map of Rockwool Automatic Monitoring Site (Original Location Cadairfarch Farm)

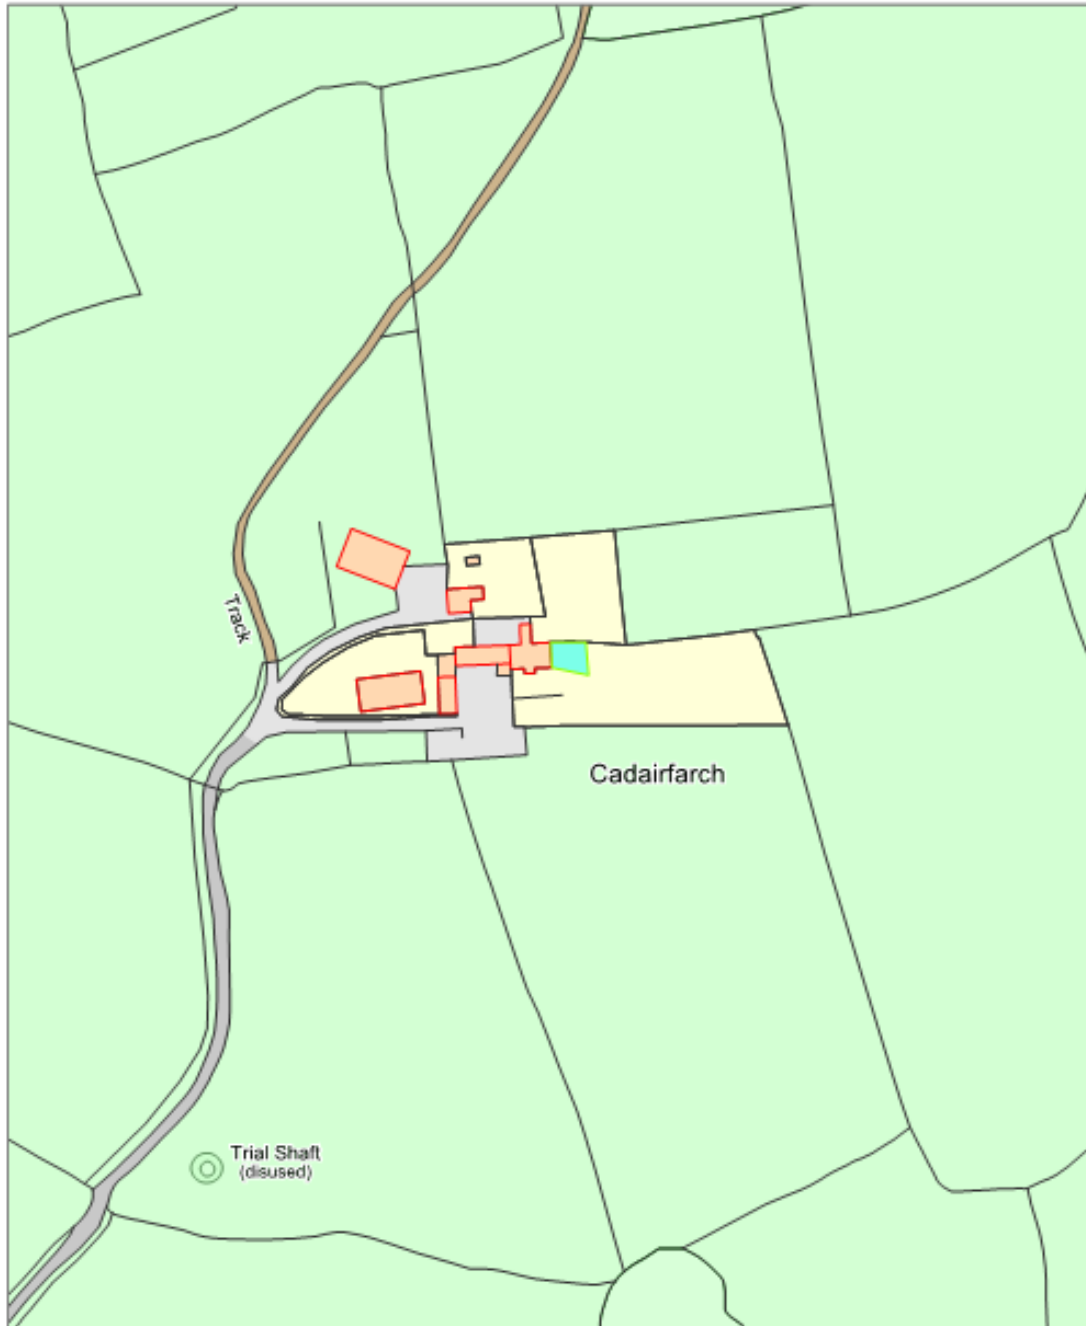


Figure 2.3- Map of Rockwool Automatic Monitoring Site (New Location- Vestry of Soar Chapel, Rhiwceiliog est October 2017)



Table 2.1 Details of Automatic Monitoring Sites

Site ID	Site Name	Site Type	X OS Grid Reference	Y OS Grid Reference	Inlet Height (m)	Pollutants Monitored	In AQMA?	Monitoring Technique	Relevant Exposure? (Y/N with distance (m) from monitoring site to relevant exposure)	Distance to Kerb of Nearest Road (m) (N/A if not applicable)	Does this Location Represent Worst-Case Exposure?
CM1	Ewenny Cross Roundabout	Roadside	290565	178567	2.0	NO ₂ PM ₁₀	N	Automated continuous NOx Analyser Met One E-Sampler PM ₁₀ monitor	Y (8.8m)	2.22m	Y
CM2 (Original)	Rockwool	Industrial	297512	184539	4.0	SO ₂	N	Automated continuous SO ₂ Analyser	1700m	N/A	Y
CM2 (Revised)	Rockwool	Industrial	297232	184331	4.0	SO ₂	N	Automated continuous SO ₂ Analyser	1200m	7.5m	Y

2.1.2 Non-Automatic Monitoring Sites

SRS on behalf of BCBC carries out monitoring of ambient air quality for nitrogen dioxide (NO₂). In 2017, **30** specifically allocated non-automatic monitoring sites in Bridgend monitored levels of nitrogen dioxide (NO₂). The non-automatic sites do not provide live data; instead they consist of diffusion tubes which are placed at each of the sites, collected and replaced on a rolling monthly basis. The results derived from the tube sampling are then averaged over the year to enable a comparison of the results against the **annual average (40µg/m³) and 1-hour (200µg/m³ not to be exceeded > 18 times per year)** air quality objectives for NO₂.

With regards to prioritising ambient air quality sampling locations, the Council adopts a risk based approach to any allocation of monitoring sites, considering the requirements of Local Air Quality Management Technical Guidance 16, February 2018 (previously April 2016). The designated monitoring locations have been assigned based on relevant exposure and where the certain Air Quality Objective levels for a particular pollutant applies. The document states that annual mean objectives should apply at “All locations where members of the public might be regularly exposed. Building facades of residential properties, schools, hospitals, car homes etc.”

National background concentrations provided by Defra are now utilised for the purpose of bias correcting and annualising data can be obtained via the website link:

<https://uk-air.defra.gov.uk/data/laqm-background-maps?year=2015>

NO₂ Diffusion Tube Locations

The location of the 7 areas where NO₂ monitoring took place in 2017;

- a. Tondu Road Roundabout at the Western End of the Bridgend Cross Valley Link Road (**Figure 2.4a** Area A).
- b. Ewenny Cross Roundabout, Bridgend (**Figure 2.4b** Area B).
- c. Nolton Street/ Ewenny Cross Link/ A473 Cowbridge Road (**Figure 2.4c** Area C).
- d. Bridgend town Centre (**Figure 2.4d** Area D).
- e. Park Street (**Figure 2.4e** Area E).
- f. Coity Road (**Figure 2.4f** Area F).
- g. Maesteg Town Centre (**Figure 2.4g** Area G).

The location, site description and data gathered since January 2017 are given in Table 2.2. The data has been gathered over a period of 12 months between January and December 2017, adhering to specific monitoring dates controlled by Defra.

Laboratory Methods and Analysis of Diffusion Tubes

Analysis of the exposed tubes is carried out by Environmental Scientifics Group Didcot (**now formally known as Socotec**) operating procedure HS/GW1/1015, issue 10. The tubes are prepared by spiking acetone:triethanolamine (50:50) on the grids prior to the tubes being assembled. The tubes are desorbed with distilled water and the extract analysed using a segmented flow auto analyser with ultraviolet detection. As set out in the practical guidance the results were initially calculated assuming an ambient temperature of 11°C and then adjusted to 20°C to allow direct comparison with EU limits. The national bias correction factor for this laboratory was utilised as opposed to our own local co-location data. The reason for this was due to an inconsistent calibration record, whereby calibrations of the NO_x analyser were not undertaken every two weeks, as outlined in LAQM (TG16). Adopting best practice, no local co-location was carried out and a bias correction factor of 0.77 was obtained and applied using the DEFRA website, available using the following link; <https://laqm.defra.gov.uk/bias-adjustment-factors/national-bias.html>

Where valid data capture for the year is less than 75% (9 months), the NO₂ diffusion tube monitoring data have been “annualised” following the methods as described in Box 7.10 of LAQM (TG16).

Where an exceedance is measured at a monitoring site not representative of public exposure, NO₂ concentration at the nearest relevant exposure has been estimated based on the “NO₂ fall-off with distance” calculator (<http://laqm.defra.gov.uk/tools-monitoring-data/no2-falloff.html>). The procedure is described in LAQM. TG16 Section 7.77-7.79.

Figure 2.4a – AREA A – Tondu Roundabout NO₂ Diffusion Tube Locations

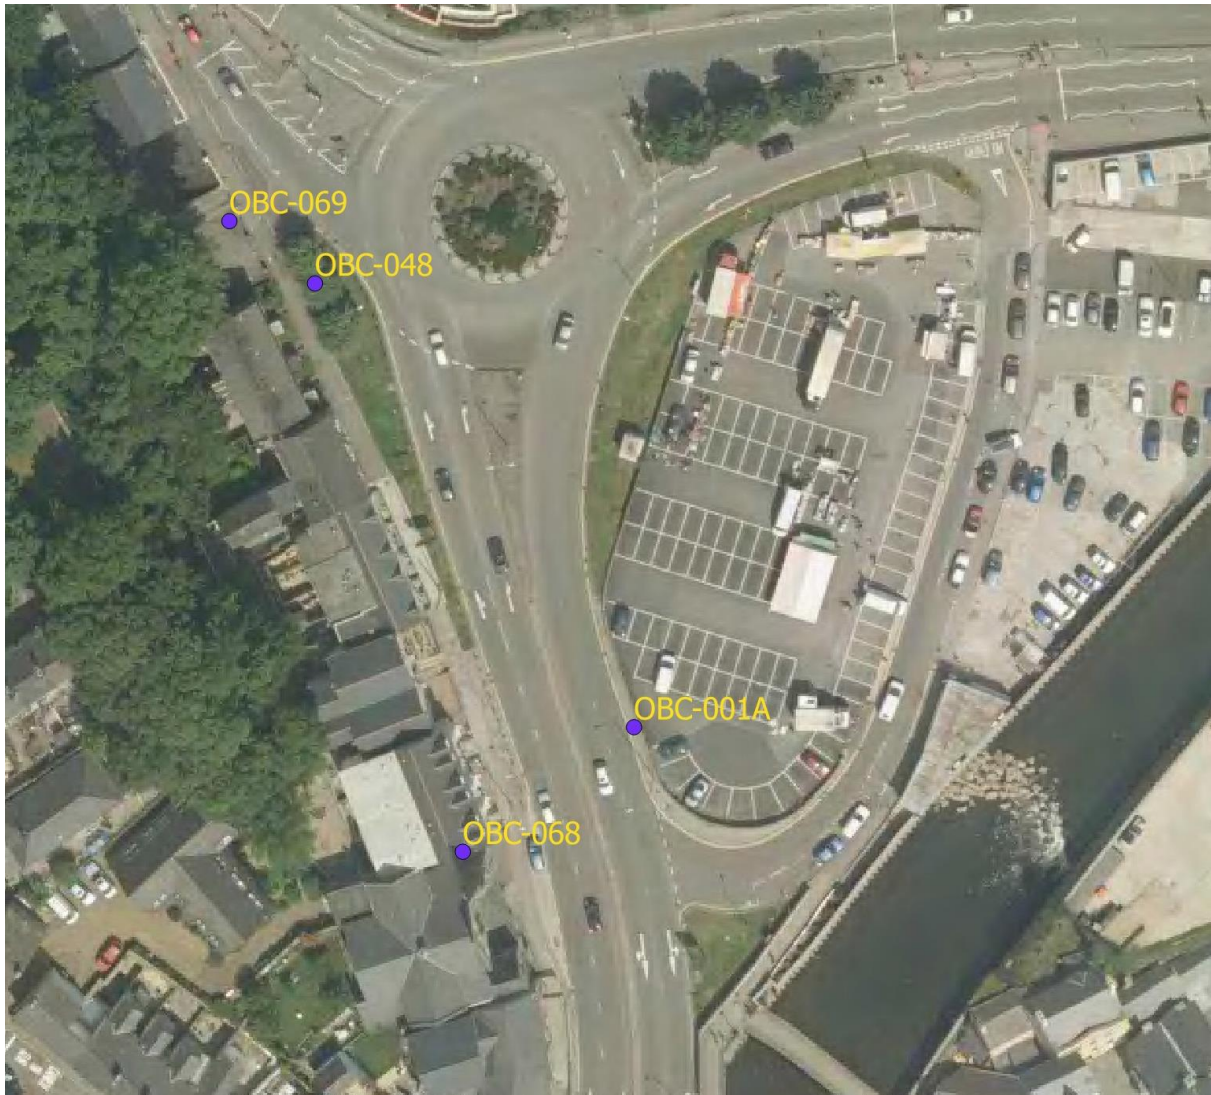


Figure 2.4b – AREA B – Ewenny Cross Roundabout, A48 By-Pass NO₂ Diffusion Tube Locations



Figure 2.4c – AREA C – Nolton Street/ Ewenny Cross Link/ A473 Cowbridge Road NO₂ Diffusion Tube Locations



Figure 2.4d – Area D – Bridgend town Centre NO₂ Diffusion Tube Location

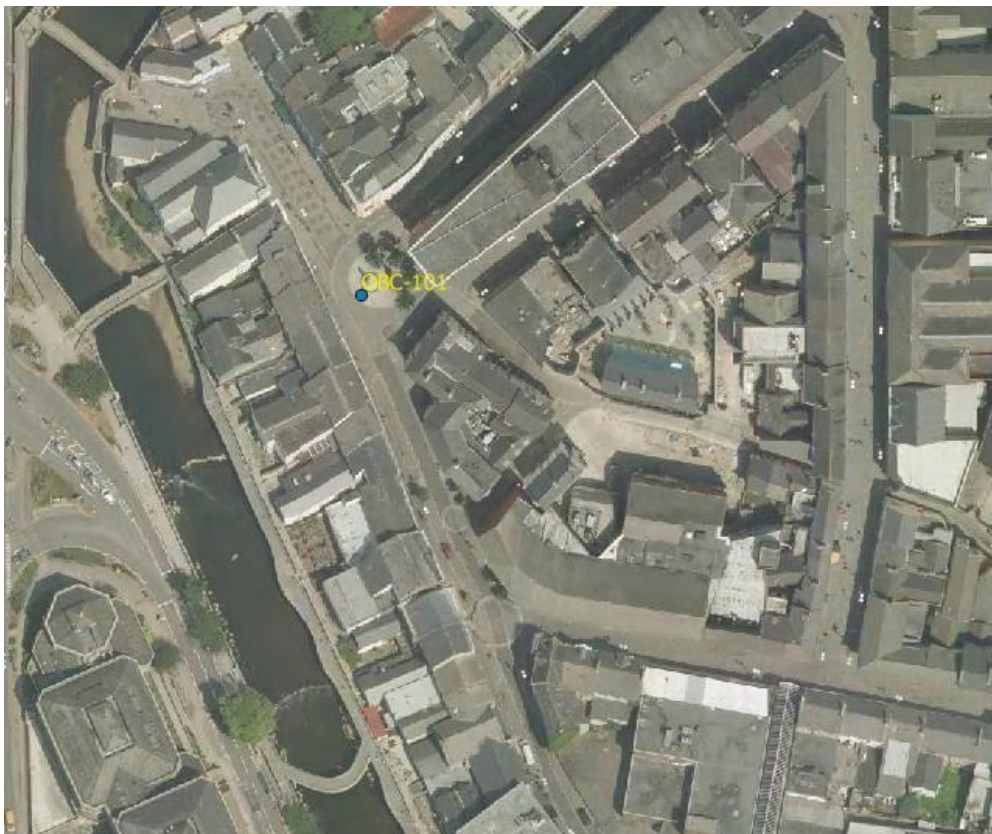


Figure 2.4e – Area E – Park Street NO₂ Diffusion Tube Locations



Figure 2.4f – Area F – Coity Road NO₂ Diffusion Tube Locations



Figure 2.4g – AREA G – Maesteg Town Centre NO₂ Diffusion Tube Locations



Table 2.2 Details of Non-Automatic Monitoring Sites 2017

Site Id	Area	Site Name	Site Type	X OS Grid Ref.	Y OS Grid Ref.	Site Height (m)	Pollutants Monitored	In AQMA	Co-located with Continuous Analyser (Y/N)	Relevant Exposure? ¹ (Y/N with (m) to relevant exposure)	Distance to kerb of nearest road in metres	Worst-case Location?
TONDU ROAD ROUNDABOUT												
OBC-001A	A	Tondu Road, Bridgend	Kerbside	290378	179940	2.0	NO ₂	N	N	(N) 6.74	0.46	N
OBC-048	A	Tondu Road Roundabout, Bridgend	Roadside	290337	179997	2.0	NO ₂	N	N	(N) 9.60	2.23	N
OBC-068	A	Bridgend United Club	Roadside	290356	179924	2.0	NO ₂	N	N	(Y) 0.00	3.83	Y
OBC-069	A	Tondu Rd Steps	Roadside	290326	180005	2.0	NO ₂	N	N	(N)10.44	2.89	N
EWENNY CROSS ROUNDABOUT												
OBC-041	B	Priory Avenue, Bridgend	Roadside	290733	178535	2.0	NO ₂	N	N	(N) 7.38	1.29	N
OBC-043	B	A48 Bypass, Bridgend	Roadside	290609	178567	2.0	NO ₂	N	N	(N) 9.79	2.04	N
OBC-044	B	Ewenny Road, Bridgend	Roadside	290680	178582	2.0	NO ₂	N	N	(N) 10.38	13.66	N
OBC-055	B	Ewenny Road	Roadside	290583	178371	2.0	NO ₂	N	N	(N) 6.48	3.18	N
OBC-056	B	Ewenny Road	Kerbside	290596	178361	2.0	NO ₂	N	N	(N)11.83	0.47	N
OBC-078	B	Corner of Ewenny Roundabout	Roadside	290662	178533	2.0	NO ₂	N	N	(N) 4.40	1.85	N
OBC-085	B	A48 Bypass, Bridgend	Roadside	290524	178541	2.0	NO ₂	N	N	(Y) 0.00	10.28	Y
OBC-087	B	A48 Bypass, Bridgend	Roadside	290606	178572	2.0	NO ₂	N	N	(Y) 0.00	9.40	Y
OBC-088	B	A48 Bypass, Bridgend-Co-Location Study 1	Roadside	290566	178566	2.0	NO ₂	N	Y	(Y) 0.00	2.20	Y
OBC-089	B	A48 Bypass, Bridgend-Co-Location Study 2	Roadside	290566	178566	2.0	NO ₂	N	Y	(Y) 0.00	2.20	Y
OBC-090	B	A48 Bypass, Bridgend-Co-Location Study 3	Roadside	290566	178566	2.0	NO ₂	N	Y	(Y) 0.00	2.20	Y
OBC-091	B	A48 Bypass, Bridgend	Roadside	290610	178533	2.0	NO ₂	N	N	(Y) 0.00	13.39	Y
NOLTON STREET/ EWENNY CROSS LINK/ A473 COWBRIDGE ROAD												
OBC-049	C	Nolton Street, Bridgend	Roadside	290700	179305	2.0	NO ₂	N	N	(Y) 0.00	4.25	Y
OBC-050	C	Ewenny Road, Bridgend	Roadside	290665	179293	2.0	NO ₂	N	N	(Y) 0.00	7.33	Y
OBC-105	C	Cowbridge Road	Roadside	290899	179185	2.0	NO ₂	N	N	(Y) 0.00	4.10	Y
OBC-106	C	Cowbridge Road	Kerbside	290826	179210	2.0	NO ₂	N	N	(N) 3.30	0.90	N
BRIDGEND TOWN CENTRE												
OBC-101	D	Bridgend town Centre	Urban Centre	290469	179837	2.0	NO ₂	N	N	(Y) 0.00	1.0	Y
PARK STREET												
OBC-102	E	Sunnyside Street	Roadside	290354	179807	2.0	NO ₂	N	N	(Y) 0.00	2.95	Y
OBC-103	E	Park Street	Roadside	290250	179782	2.0	NO ₂	N	N	(Y) 0.00	1.20	Y

OBC-104	E	Park Street	Roadside	290286	179800	2.0	NO ₂	N	N	(Y) 0.00	1.05	Y
COITY ROAD												
OBC-097	F	Coity Road, Bridgend	Roadside	290687	180185	2.0	NO ₂	N	N	(Y) 0.00	5.30	Y
OBC-098	F	Coity Road, Bridgend	Roadside	290681	180198	2.0	NO ₂	N	N	(Y) 0.00	4.20	Y
OBC-099	F	Coity Road, Bridgend	Roadside	290663	180251	2.0	NO ₂	N	N	(Y) 0.00	5.60	Y
OBC-100	F	Coity Road, Bridgend	Roadside	290623	180374	2.0	NO ₂	N	N	(Y) 0.00	4.10	Y
MAESTEG TOWN CENTRE												
OBC-080	G	Commercial Street, Maesteg	Urban Centre/ Kerbside	285131	191284	2.0	NO ₂	N	N	(Y) 0.00	0.58	Y
OBC-081	G	Talbot Street, Maesteg	Urban Centre / Roadside	285229	191331	2.0	NO ₂	N	N	(Y) 0.00	1.26	Y
OBC-082	G	Castle Street, Maesteg	Urban Centre / Roadside	285296	191398	2.0	NO ₂	N	N	(Y) 0.00	2.72	Y
OBC-083	G	Castle Street, Maesteg	Urban Centre / Roadside	285370	191382	2.0	NO ₂	N	N	(Y) 0.00	2.04	Y

Notes:

1. 0m if the monitoring site is at a location of exposure (e.g. installed on the façade of a residential property)

2.2 2017 Air Quality Monitoring Results

Table 2.1 – Non-automatic Annual Mean NO₂ Monitoring Results (2013- 2017)

Site ID	Site Type	Monitoring Type	Valid Data Capture 2017 (%) ⁽¹⁾	Within AQMA?	Annual Mean Concentration (µg/m ³) ⁽²⁾				
					2013 (Bias Adjustment Factor = 0.80)	2014 (Bias Adjustment Factor = 0.81)	2015 (Bias Adjustment Factor = 0.81)	2016 (Bias Adjustment Factor = 0.78)	2017 (Bias Adjustment Factor = 0.77)
TONDU ROAD ROUNDABOUT									
OBC-001A	Kerbside	Diffusion Tube	83	N	33	40	27	38	34.2/ 24.2 ⁽³⁾
OBC-048	Roadside	Diffusion Tube	83	N	41	36	34	42	38.1/ 28.2 ⁽³⁾
OBC-068	Roadside	Diffusion Tube	83	N	32	28	26	27	25.9
OBC-069	Roadside	Diffusion Tube	58	N	40	29	27	34	29.9/ 23.4 ^(2 & 3)
NOLTON STREET/ EWENNY CROSS LINK/ A473 COWBRIDGE ROAD									
OBC-049	Roadside	Diffusion Tube	58	N	18	28	27	27	27.9/ 27.3 ^(2 & 3)
OBC-050	Roadside	Diffusion Tube	50	N	24	19	16	22	19.0/ 17.8 ^(2 & 3)
OBC-105	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	24.6
OBC-106	Kerbside	Diffusion Tube	42	N	N/A	N/A	N/A	N/A	30.4/ 25.2 ^(2 & 3)
EWENNY CROSS ROUNDABOUT									
OBC-041	Roadside	Diffusion Tube	83	N	27	24	24	26	23.0/ 17.7 ⁽³⁾
OBC-043	Roadside	Diffusion Tube	83	N	43	38	35	39	37.5/ 26.1 ⁽³⁾
OBC-044	Roadside	Diffusion Tube	83	N	28	27	26	27	25.9/ 22.0 ⁽³⁾
OBC-055	Roadside	Diffusion Tube	83	N	22	18	16	20	23.0/ 19.2 ⁽³⁾

Site ID	Site Type	Monitoring Type	Valid Data Capture 2017 (%) ⁽¹⁾	Within AQMA?	Annual Mean Concentration ($\mu\text{g}/\text{m}^3$) ⁽²⁾				
					2013 (Bias Adjustment Factor = 0.80)	2014 (Bias Adjustment Factor = 0.81)	2015 (Bias Adjustment Factor = 0.81)	2016 (Bias Adjustment Factor = 0.78)	2017 (Bias Adjustment Factor = 0.77)
OBC-056	Kerbside	Diffusion Tube	83	N	30	31	29	32	26.6/ 17.1 ⁽³⁾
OBC-078	Roadside	Diffusion Tube	83	N	33	31	29	31	30.5/ 24.7 ⁽³⁾
OBC-085	Roadside	Diffusion Tube	83	N	27	21	23	21	19.9
OBC-087	Roadside	Diffusion Tube	67	N	19	21	22	20	20.0 ⁽²⁾
OBC-088	Roadside	Diffusion Tube	83	N	24	22	21	21	20.3
OBC-089	Roadside	Diffusion Tube	83	N	24	22	21	23	21.8
OBC-090	Roadside	Diffusion Tube	75	N	24	23	23	21	19.5
OBC-091	Roadside	Diffusion Tube	83	N	28	25	23	24	22.0
BRIDGEND TOWN CENTRE									
OBC-101	Urban Centre	Diffusion Tube	58	N	N/A	N/A	N/A	N/A	18.1 ⁽²⁾
PARK STREET									
OBC-102	Roadside	Diffusion Tube	75	N	N/A	N/A	N/A	N/A	23.7
OBC-103	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	37.6
OBC-104	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	41.5
COITY ROAD									
OBC-097	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	26.3
OBC-098	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	24.0
OBC-099	Roadside	Diffusion Tube	83	N	N/A	N/A	N/A	N/A	23.8

Site ID	Site Type	Monitoring Type	Valid Data Capture 2017 (%) ⁽¹⁾	Within AQMA?	Annual Mean Concentration ($\mu\text{g}/\text{m}^3$) ⁽²⁾				
					2013 (Bias Adjustment Factor = 0.80)	2014 (Bias Adjustment Factor = 0.81)	2015 (Bias Adjustment Factor = 0.81)	2016 (Bias Adjustment Factor = 0.78)	2017 (Bias Adjustment Factor = 0.77)
OBC-100	Roadside	Diffusion Tube	75	N	N/A	N/A	N/A	N/A	24.1
MAESTEG TOWN CENTRE									
OBC-080	Urban / Kerbside	Diffusion Tube	50	N	36	34	24	23	23.9 ⁽²⁾
OBC-081	Urban / Roadside	Diffusion Tube	58	N	38	26	25	24	21.4 ⁽²⁾
OBC-082	Urban / Roadside	Diffusion Tube	42	N	37	48	26	28	23.4 ⁽²⁾
OBC-083	Urban / Roadside	Diffusion Tube	42	N	33	26	26	29	25.1 ⁽²⁾

Notes:

Exceedances of the NO₂ annual mean objective of 40 $\mu\text{g}/\text{m}^3$ are shown in **bold**.


NO₂ annual means exceeding 60 $\mu\text{g}/\text{m}^3$, indicating a potential exceedance of the NO₂ 1-hour mean objective are shown in **bold and underlined**.

(1) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(2) Diffusion tube data has been “bias adjusted” in accordance with Box 7.11 in LAQM.TG16 and “annualised” as per Boxes 7.9 and 7.10 in LAQM.TG16 if valid data capture for the full calendar year is less than 75%. See Appendix C for details.

(3) Diffusion tube data has been corrected for distance to represent relevant exposure in accordance with Sections 7.77- 7.79 in LAQM.TG16 “Fall-off in NO₂ concentrations with Distance from the Road”

Figure 2.5 – Trends in Annual Mean NO₂ Concentrations

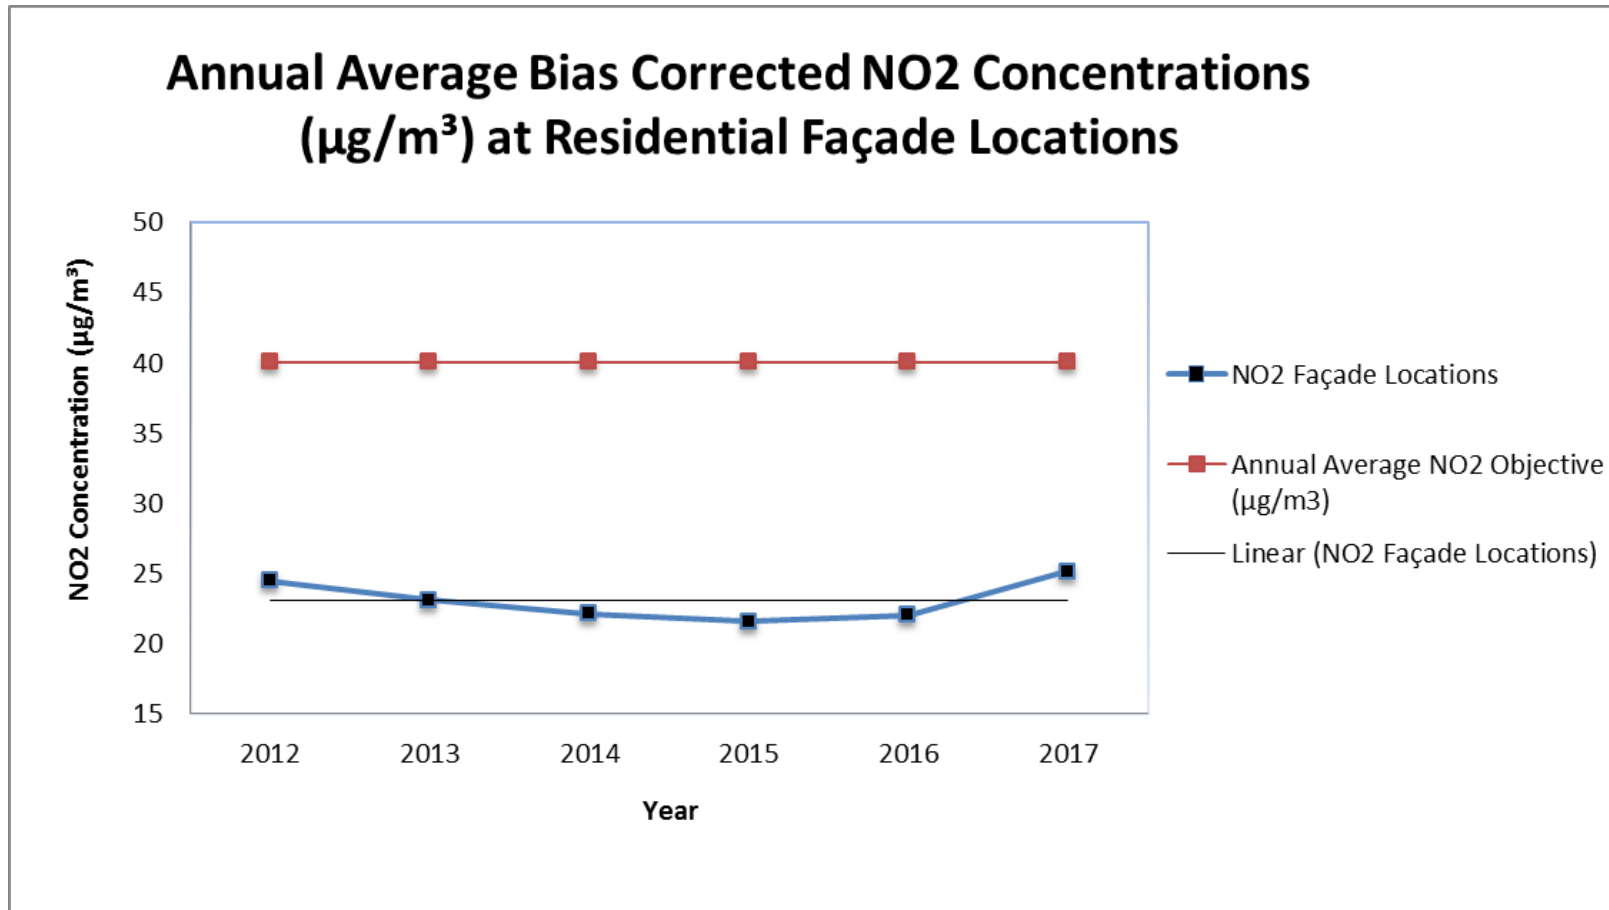

The graph represents annual average bias corrected NO₂ data since 2012. The locations examined represent worst case exposure due to the fact monitoring was undertaken at residential façade locations. The displayed average datasets indicate **compliant** NO₂ results for Bridgend in general since 2012. The results are somewhat stable. Datasets utilised for 2017 include newly added monitoring locations at residential properties.

Table 2.4 – Automatic Annual Mean NO₂ Monitoring Results (2013- 2017)

Site ID	Site Type	Within AQMA?	Valid Capture Monitoring Period % ⁽¹⁾	Data for 2017	Valid Capture % ⁽²⁾	Annual Mean Concentration (µg/m ³)				
						2013	2014	2015	2016	2017
CM1	Roadside	N	100		27	42	NR ⁽⁴⁾	30.49 ⁽³⁾	32.37	25.7 ⁽³⁾

Notes:

Exceedances of the Annual Average NO₂ objective (40µg/m³) are shown in bold.

(1) Data capture for the monitoring period, in cases where monitoring was only carried out for part of the year.

(2) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(3) Data has been “annualised” as per Boxes 7.9 in LAQM.TG16 where valid data capture for the full calendar year is less than 75%. See Appendix C for details.

(4) NO RESULT “NR”. No data recorded for 2014 due to technical faults incurred with Automatic Monitoring Station

Table 2.5 –Automatic 1-hour Mean NO₂ Monitoring Results (2013- 2017)

Site ID	Site Type	Within AQMA?	Valid Capture Monitoring Period % ⁽¹⁾	Data for 2017	Valid Capture % ⁽²⁾	Number of Hourly Means (> 200µg/m ³) ⁽³⁾				
						2013	2014	2015	2016	2017
CM1	Roadside	N	100		27	0	NR ⁽⁴⁾	0 (30.44)	0	0 (131.3)

Notes:

Exceedances of the NO₂ 1-hour mean objective (200µg/m³ not to be exceeded more than 18 times/year) are shown in bold.

(1) Data capture for the monitoring period, in cases where monitoring was only carried out for part of the year.

(2) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(3) If the period of valid data is less than 85%, the 99.8th percentile of 1-hour means is provided in brackets.

(4) NO RESULT “NR”. No data recorded for 2014 due to technical faults incurred with Automatic Monitoring Station.

Table 2.6 – Automatic Annual Mean PM₁₀ Monitoring Results (2013- 2017)

Site ID	Site Type	Within AQMA?	Valid Capture Monitoring Period (%) ⁽¹⁾	Data for 2017	Valid Capture (%) ⁽²⁾	Confirm Gravimetric Equivalent (Y or N/A)	PM ₁₀ Annual Mean Concentration (µg/m ³) ⁽³⁾				
							2013	2014	2015	2016	2017
CM1	Roadside	N	100		12	N/A	14.30	NR ⁽⁴⁾	NR ⁽⁴⁾	15.18 ⁽³⁾	NR ⁽⁴⁾

Notes:

Exceedances of the PM₁₀ annual mean objective of 40µg/m³ are shown in bold.

(1) Data capture for the monitoring period, in cases where monitoring was only carried out for part of the year.

(2) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(3) Data has been “annualised” as per Boxes 7.9 and 7.10 in LAQM.TG16 where valid data capture for the full calendar year is less than 75%. See Appendix C for details.

(4) NO RESULT “NR”. No data recorded for 2014, 2015 & 2017 due to technical faults incurred with Automatic Monitoring Station.

Table 2.7 – Automatic 24-Hour Mean PM₁₀ Monitoring Results (2013- 2017)

Site ID	Site Type	Within AQMA?	Valid Capture Monitoring Period (%) ⁽¹⁾	Data for 2017	Valid Capture (%) ⁽²⁾	Confirm Gravimetric Equivalent (Y or N/A)	Number of Daily Means > 50µg/m ³ ⁽³⁾				
							2013	2014	2015	2016	2017
CM1	Roadside	N	100		12	N/A	0	NR ⁽⁴⁾	NR ⁽⁴⁾	2 (24.66)	NR ⁽⁴⁾

Notes:

Exceedances of the PM₁₀ 24-hour mean objective (50µg/m³ not to be exceeded more than 35 times/year) are shown in **bold**.

(1) Data capture for the monitoring period, in cases where monitoring was only carried out for part of the year.

(2) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(3) If the period of valid data is less than 85%, the 90.4th percentile of 24-hour means is provided in brackets.

(4) NO RESULT “NR”. No data recorded for 2014, 2015 & 2017 due to technical faults incurred with Automatic Monitoring Station.

Table 2.8 – Automatic SO₂ Monitoring Results: Comparison with Objectives

Site ID	Site Type	Within AQMA?	Valid Data Capture for Monitoring Period (%) ⁽¹⁾	Valid Data Capture 2017 (%) ⁽²⁾	Number of Exceedences (percentile in bracket µg/m ³)		
					15-minute Objective (266 µg/m ³)	1-hour Objective (350 µg/m ³)	24-hour Objective (125 µg/m ³)
CM2	Industrial	N	100	70.1	0 (39.82) ⁽³⁾	0 (32.36) ⁽⁴⁾	0 (30.27) ⁽⁵⁾

Notes:

Exceedences of the SO₂ mean objectives are shown in **bold**.

(1) Data capture for the monitoring period, in cases where monitoring was only carried out for part of the year.

(2) Data capture for the full calendar year (e.g. if monitoring was carried out for 6 months, the maximum data capture for the full calendar year is 50%).

(3) In accordance with LAQM TG(16), due to the fact data capture is <85% it is a requirement to report the 99.9th percentile for 15 minute SO₂, however in this instance it is the 99.9th percentile for 10 minute SO₂.

(4) In accordance with LAQM TG(16), due to the fact data capture is <85% it is a requirement to report the 99.7th percentile for 1 hour SO₂.

(5) In accordance with LAQM TG(16), due to the fact data capture is <85% it is a requirement to report the 99.2nd percentile for 24 hour SO₂.



2.3 Comparison of 2017 Monitoring Results with Previous Years and the Air Quality Objectives

During 2017 monitoring was carried out for nitrogen dioxide (NO₂), particulate matter (PM₁₀) and Sulphur Dioxide (SO₂). There was no monitoring undertaken for benzene or 1-3-butadiene.

2.3.1 Nitrogen Dioxide (NO₂)

Nitrogen dioxide was measured during 2017 at one site equipped with an automatic NO_x analyser and by a network of 30 passive diffusion tubes.

In order to ratify the 2017 diffusion tube dataset, a bias adjustment factor of 0.77 was applied to the annual average readings. The factor was derived from the Defra website which gave the average correction factor from 29 co-location studies across the UK, whereby the analytical laboratory and method used was the same as BCBC.

Automatic Monitoring Data

Monitoring of NO₂ has continued to be carried out at the Ewenny Cross Roundabout Automatic Monitoring Site. As previously discussed, due to quality and technical issues in 2017, data capture for NO₂ from the Ewenny automated site was limited to 27% and a site specific co-location study could not be performed. Annual average NO₂ datasets have been annualised in accordance to the requirements of LAQM TG(16), Box 7.9. **Tables 2.4 & 2.5** confirms compliance with the set long term and short term NO₂ air quality objectives in 2017.

Non- automated Monitoring Data

Annual average datasets outline elevated and exceeding levels of NO₂ at sensitive receptor locations situated on Park Street, Bridgend. There are two sites of particular concern; **Sites OBC-103 & OBC-104**. These sites provided annual average levels of **37.6 & 41.5µg/m³**.

In view of the given elevated and exceeding annual average figures examined at Park Street, Bridgend, it is proposed that the Ewenny Automated Monitoring site be located to a new location on Park Street. This will provide a greater level of certainty which regards to air quality levels. The Specialist Service Team has also acquired a new member of staff (Sampling Officer) and entered an annual contract with appointed contractors whom will manage the data collected by the automated NO_x and PM₁₀ analysers. These measures will hopefully eradicate any quality or technical concerns as previously experienced.

2.3.2 Particulate Matter (PM₁₀)

As described in previous sections, monitoring of PM₁₀ has continued to be carried out at Ewenny Cross Roundabout. However, Due to mechanical issues and technical data issues, the Met One E PM10 Sampler captured only 12% valid data in 2017. Therefore a NO RESULT (**NR**) value was given for PM10.

2.3.3 Sulphur Dioxide (SO₂)

Monitoring of Sulphur Dioxide SO₂ has continued to be carried out by Rockwool Ltd in the Rhiwceilog area of Bridgend. Monitoring has been carried out using an API AMX monitor capable of giving continuous fifteen minute averages of Sulphur Dioxide SO₂ concentrations. The equipment is calibrated by an Environment Officer at Rockwool and serviced and maintained by an approved contractor on a six monthly basis. Data obtained is checked for validation and ratified by Rockwool's Environment Officer.

The total data capture for 2017 was 70.1%. There were no exceedences of the objectives during this time period. With regards to the 15 minute SO₂ objective, Rockwool has provided 10 minute sampling periods, therefore please be aware that the result stipulated in **Table 2.8** gives the 10 minute 99.9th Percentile result.

As previously mentioned, due to continued compliance with the SO₂ air quality objectives, appointed officers from Rockwool Ltd, BCBC and NRW decided upon a new preferred location for the SO₂ automated monitoring station. On the 3rd October 2017 the monitoring was assigned to its new location in the vestry of Soar Chapel, Rhiwceilog.

2.4 Summary of Compliance with AQS Objectives as of 2017

BCBC Intends to declare an AQMA (by way of the Fast Track declaration process) for Park Street, Bridgend due to the proven exceedance of the annual average NO₂ objective (40µg/m³).

3. New Local Developments

3.1 Road Traffic Sources (& other transport)

SRS on behalf of BCBC can confirm that there are no new significant developments since the Progress Report in 2017. The 2017 highlighted the potential for increased vehicular access to parts of Bridgend Town Centre. Due to financial funding difficulties this proposal has since become stagnant and therefore no further progress made.

3.1.1 Airports

SRS on behalf of BCBC confirms that there are no airports in the Local Authority area. However a small quantity of air traffic now traverses the south eastern part of the County Borough prior to its final approach to Cardiff International airport, Rhooose. It is unlikely that the emissions from the aircraft, in view of this small number, will have a significant effect on air quality in Bridgend.

3.1.2 Railways (Diesel and Steam Trains)

Stationary Trains

SRS on behalf of BCBC confirms that there are no locations where diesel or steam trains are regularly stationary for periods of 15 minutes or more, with potential for relevant exposure within 15m.

Moving Trains

SRS on behalf of BCBC confirms that there are no locations with a large number of movements of diesel locomotives, and potential long-term relevant exposure within 30m.

3.1.3 Ports (Shipping)

SRS on behalf of BCBC confirms that there are no ports or shipping that meets the specified criteria within the Local Authority area.



3.2 Industrial / Fugitive or Uncontrolled Sources / Commercial Sources

3.2.1 New or Proposed Installations for which an Air Quality Assessment has been Carried Out

SRS on behalf of BCBC has assessed new/proposed industrial installations, and concluded that no further air quality analysis via a detailed air quality assessment is necessary.

3.2.2 Existing Installations where Emissions have Increased Substantially or New Relevant Exposure has been introduced

SRS on behalf of BCBC confirms that there are no industrial installations with substantially increased emissions or new relevant exposure in their vicinity within its area or nearby in a neighbouring authority.

3.2.3 New or Significantly Changed Installations with No Previous Air Quality Assessment

SRS on behalf of BCBC has assessed new/proposed industrial installations, and concluded that no further air quality analysis via a detailed air quality assessment is necessary.

3.2.4 Major Fuel (Petrol) Storage Depots

SRS on behalf of There are no major fuel (petrol) storage depots within the Local Authority area.

3.2.5 Petrol Stations

SRS on behalf of BCBC confirms that there are no petrol stations meeting the specified criteria.

3.2.6 Poultry Farms

SRS on behalf of BCBC confirms there are no poultry farms meeting the specified criteria.



3.3 Commercial and Domestic Sources

3.3.1 Biomass Combustion – Individual Installations

As previously identified in the 2011 Progress Report, planning consent had been granted for the installation of a Bio Gas Plant with gas pipeline and in vessel composting facility. It has however been established that the proposed development will not have a significant impact on air quality.

The 2016 Progress Report highlighted that planning consent has been granted for the installation of a bio-mass plant within the Llynfi Valley. However the plant has not yet been installed.

In April 2017, subject to the fulfillment of conditions sanctioned by criteria detailed within the consent application and requirements highlighted within the Clean Air Act legislation, consent under the Clean Air Act, 1993 has been granted for the operation of a Novalux Energy Solutions Ltd 999kWt Wood Chip Biomass System and its emissions at Pentre Hwnt Farm, Llampha, Bridgend.

3.3.2 Biomass Combustion – Combined Impacts

SRS on behalf of BCBC has assessed the proposed biomass combustion plant, and concluded that no further air quality analysis via a detailed air quality assessment is necessary.

3.3.3 Other Sources

3.3.4 Domestic Solid-Fuel Burning

SRS on behalf of BCBC confirms that there are no areas of significant domestic fuel use in the Local Authority area.

3.4 New Developments with Fugitive or Uncontrolled Sources

SRS on behalf of BCBC confirms that there are no new potential sources of fugitive particulate matter emissions in the Local Authority area since the last Progress Report produced in 2017.



3.5 Planning Applications

Bridgend Council continue to monitor the impact of proposed developments and recent developments already underway or in use.

Since the publication of the 2016 Progress Report, major planning application (**P/16/549/OUT**) had been recently approved subject to discharge of conditions for a development of up to 71,441sq.m of B1, B2 and B8 employment floor space, including access, car parking, diversion of public rights of way, site remediation, drainage, landscaping and associated engineering operations. The site is located on land east of the A48 (Crack Hill) Brocastle, Bridgend. In terms of air quality, following correspondence with SRS Specialist Officers, the following air quality conditions have been implemented;

-No development shall commence until a 'Construction Environmental Management Plan' (CEMP) to minimise dust emissions arising from construction activities on the site has been submitted to and agreed in writing by the Local Planning Authority. The scheme shall include details of dust suppression measures and the methods to monitor emissions of dust arising from the development and shall include the control measures as detailed in section 5.4.2 of Chapter 5 of the Air Quality Assessment contained in the Environmental Statement 'Land at Brocastle, Bridgend. Environmental Statement Volume II. The construction phase shall be implemented in accordance with the agreed scheme with the approved dust suppression measures being maintained in a fully functional condition for the duration of the construction phases. Reason: In the interests of safeguarding the amenities of existing residents.

-No development shall commence until a revised Air Quality Assessment (AQA) has been submitted to and agreed in writing by the Local Planning Authority. The AQA should address the following additional scenario which would encapsulate a cumulative air quality impact: Year of 2026 (projected year of opening for Parc Ewenni), providing projected concentration levels for traffic derived NO2 & PM10 (both from the natural increase in traffic and the increase that will be generated as a result of this development) at the already designated sensitive receptors. The 2026 scenario should look to examine a cumulative effect whereby both the Parc Ewenni and Brocastle developments will be in place. Where the Air Quality objectives are indicated to be exceeded, mitigation measures shall be included in the revised report. The mitigation measures and a program of implementation shall be



submitted to and agreed in writing by the Local Planning Authority prior to any development commencing. Reason: In the interests of limiting air pollution resulting from the development.

At the time of writing this report, the supporting air quality assessment (AQA) in accordance with the referenced planning application has been submitted for review. The AQA considers the operational phase impacts of the proposed development. For operational purposes the modelling accounts for 2 scenarios, which focus around 'Do-Minimum' & 'Do-Something' scenarios for a proposed year of opening in 2026. The report summarises in Tables 6 & 7 that a "negligible" impact is anticipated for NO₂ & PM₁₀ for a projected year of opening at **all** sensitive receptor locations modelled.



4. Polices and Strategies Affecting Airborne Pollution

4.1 Air Quality Planning Policies

Local Development Plan (LDP) 2006- 2021. The document provides a framework for sustainable development within the County Borough of Bridgend, outlining strategies and policies for future land use and development.

One of the main strategic LDP objectives is highlighted in **Strategic Policy 4 (SP4)** which promotes the conservation and enhancement of the natural environment. SP4 illustrates that development proposals will not be permitted where they have an adverse impact upon the quality of natural resources, including water air and soil.

Also highlighted within the LDP document is Policy **ENV 7** (Natural Resource Protection and Public Health);

“Development proposals will only be permitted where it can be demonstrated that they would not cause a new, or exacerbate an existing, unacceptable risk of harm to health, biodiversity and/or local amenity due to: air pollution”

Where proposed developments indicate negative impacts, measures and mitigation methods must be detailed to enable impacts to be minimised to an acceptable level. For example, in terms of air quality, measures can include the production of an Air Quality Assessment and the implementation of conditions.

The LDP documentation for Bridgend County Council is available at http://www1.bridgend.gov.uk/media/174812/ldp_text.pdf

4.2 Local Transport Plans and Strategies

The Local Transport Plan (LTP) 2015- 2030. The Welsh Government now requires local authorities in Wales to prepare and adopt Local Transport Plan (LTPs) as the framework for identifying local transport schemes for improvements. LTPs therefore replace Regional Transport Plans.



Under guidance from the Welsh Government, local authorities have the choice to develop and adopt either joint LTPs with neighbouring local authorities or a stand-alone LTP for their own geographical area.

Bridgend County Borough Council has opted for the latter approach in view of the uncertainty of the future of local authority boundaries and structures amid discussions of reorganisation of local government.

The LTP looks to tackle growing traffic levels (and hence air quality impacts) by providing strategies which focus upon providing efficient and effective transport networks.

“The Council is mindful of the broader negative impact of transport related emissions on health and the natural environment”

“To reduce the environmental impact of transport, the LTP includes measures and interventions that will increase opportunities for active travel, encourage the use of public transport and promote modal integration.”

The LTP policy recognises the Council’s objective to achieving sustainable travel (alternatives to using cars) and reducing negative impacts on the environment. The policy suggests that through improved transport infrastructure and transport services this can be achieved.

The LTP policy is available at <http://www1.bridgend.gov.uk/media/352797/bridgend-ltp-wg-approved-version-may-2015.pdf>

4.3 Active Travel Plans and Strategies

In September 2014, the Welsh Government introduced the Active Travel (Wales) Act. This measure legally requires Welsh local authorities to map and plan suitable routes for Active Travel within certain areas, as designated by the Welsh Government.

Following formal public consultation and review by Welsh Government, BCBC has produced Integrated Network Maps (INM) that show highlighted routes dedicated to pedestrians and cyclists. The maps are available to download from;


<https://www.bridgend.gov.uk/residents/roads-transport-and-parking/active-travel-routes/>

4.4 Local Authorities Well-being Objectives

In 2015 Welsh Government made a new law called the Well-being of Future Generations (Wales) Act. The new law has the sustainable development principle at its heart. This means that we need to work in a way that improves wellbeing for people today without doing anything that could make things worse for future generations.

As highlighted in the earlier **Figure 1.2**, there are seven objectives national well-being goals that form the basis of the Act and five ways of working which support the goals.

Figure 1.2- The Well- being of Future Generations (Wales) Act 2015 Matrix

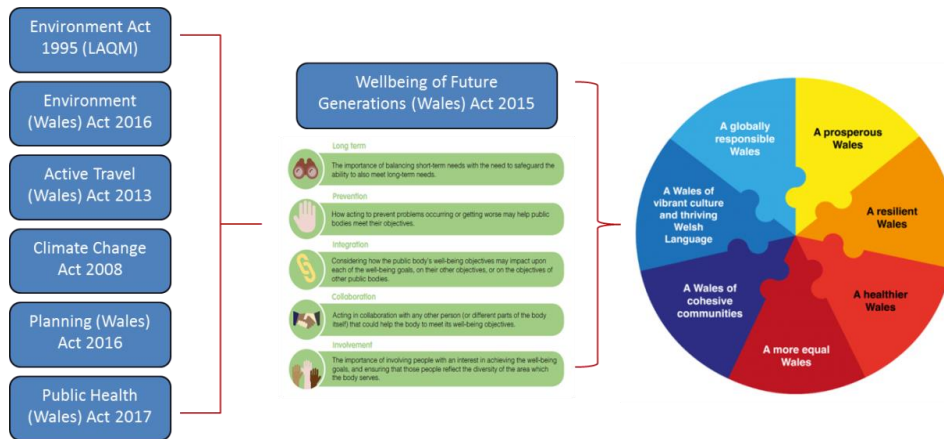

Public, third and business sectors have come together in Bridgend to form a Public Services Board (PSB). Bridgend PSB is committed to working together to improve wellbeing in Bridgend County Borough now and in the future. Bridgend PSB has used the sustainable development principle and the new five ways of working to develop a Well-Being Plan (2018-2023).

The plan outlines the things that Bridgend PSB will work together on, over the next five years, well-being objectives and steps, and provide a vision for how Bridgend will look in 10 years' time. The plan is seen as a mechanism that provides the best possible means of working to help understand the underlying causes of problems and prevent those problems getting worse or happening in the future.

Contributing to the seven national well-being goals and long term vision for Bridgend, Bridgend PSB has developed four main objectives.

Figure 2.6- Bridgend PSB Four Well-being Objectives



In accordance with air quality, as part of the objective for **“Healthy Choices in a Healthy Environment”** Bridgend PSB outlines that resources are best utilised and collaborative working ensures that the built, cultural and natural environment remains resilient in future. The priority areas to endorse and encourage the success of the objective will include working together to maximise benefit from cultural, built and natural assets. It will also look at promoting a more resource and energy efficient way of living and working. In order to measure the success of promoting a more resource and energy way of living air quality, particularly NO₂ levels will be examined.

Bridgend PSB Well-being Plan is available at;

<https://www.bridgend.gov.uk/media/3657/bridgend-wellbeing-bps-plan-e-0518.pdf>

4.5 Green Infrastructure Plans and Strategies

Outlined in Bridgend’s Local Development Plan (LDP) 2006- 2021, Policy **ENV5** focuses upon Green infrastructure.

Policy ENV5

Green Infrastructure

Green infrastructure will be provided through the protection and enhancement of existing natural assets and the creation of new multi-functional areas of green space. Green infrastructure corridors will connect locations of natural heritage, green space, biodiversity or other environmental interest.

They will be safeguarded through:

- 1) Not permitting development that compromises their integrity and therefore that of the overall green infrastructure framework;
- 2) Using developer contributions to facilitate improvements to their quality and robustness;
- 3) Investing in appropriate management, enhancement and restoration, and the creation of new resources.

A Supplementary Planning Guidance (SPG) concerning Green Infrastructure was produced in 2014 by BCBC to provide a detailed understanding to the elements raised in the LDP.



-The document highlights how the Council expect habitats to be considered as part of development proposals within the County Borough of Bridgend. It also introduces the concept of adopting a *Green Infrastructure Approach* to development.

In addition to the above, outlined within **the Bridgend PSB Well-being Plan**, as part of the objective “Healthy Choices in a Healthy Environment” and priority area to include working together to maximise benefit from cultural, built and natural assets, the steps involved will;

- identify opportunities to improve the green asset base by implementing the Bridgend Nature Recovery Plan.
- improve the public estate and green spaces in urban areas by encouraging award of green flag status.

4.6 Climate Change Strategies

The Authority's Climate Change Strategy was approved in April 2010.

Policy PLA4

Climate Change and Peak Oil

All development proposals will be required to make a positive contribution towards tackling the causes of, and adapting to the impacts of Climate Change and Peak Oil issues. Means of achieving this may include:

- Having lower carbon energy requirements by reducing energy demand, and promoting energy efficiency;
- Utilising local materials and supplies wherever feasible;
- Encouraging the development of renewable energy generation;
- Having a location and layout which reflects sustainable transport and access principles, thereby reducing the overall need to travel;
- Having a design, layout and landscaping which:
 - (i) helps wildlife and habitats to adapt to the changing climate;
 - (ii) assists cooling of the urban environment, including the use of passive building techniques where appropriate;
- Using resources more efficiently and minimising waste water use and pollution; Avoiding or minimising the risk from flooding and/ or adapting to the increased risk of flooding, coastal erosion and warmer annual mean temperatures; and
- Promoting sustainable building methods and drainage systems where appropriate.



5. Conclusions and Proposed Actions

5.1 Conclusions from New Monitoring Data

Since the commissioning of ten non-automatic NO₂ monitoring locations in 2017, a review of the yearly datasets indicate elevated and exceeding annual average levels of NO₂ at sensitive receptor locations along Park Street, Bridgend.

The two NO₂ monitoring locations situated on Park Street highlight elevated and exceeding annual average levels of NO₂ when compared to the annual average NO₂ objective set at 40µg/m³;

OBC-103- 39 Park Street (37.6µg/m³)

OBC-104- 51 Park Street (41.5µg/m³)

Despite the highlighted area of concern, compliance with the air quality objectives was achieved at all other monitoring locations.

5.2 Conclusions relating to New Local Developments/Sources

The assessment of likely impacts from new local development, transport industrial, commercial/domestic and fugitive/uncontrolled sites concludes that there are no new/newly identified sources are likely to give rise to a significant impact on air quality within the County Borough

5.3 Other Conclusions

Technical and quality issues still persisted in 2017 with the Ewenny Cross Roundabout automatic monitoring station.

5.4 Proposed Actions

Based on the 2017 figures, under Part IV of the Environment Act 1995 & Air Quality Strategy for England, Scotland, Wales and Northern Ireland 2007, according to the statutory requirements of LAQM a **DRAFT** Air Quality Action Plan (AQAP) must be implemented within 18 months of declaring an AQMA. In accordance with WG's Policy Guidance for LAQM;

4.12 A draft action plan must be produced for review by the Welsh Government within 18 months of the coming-into-force date of the AQMA order, and the action plan must be formally adopted before two years



have elapsed. A Local Authority failing to produce a draft action plan for review by the Welsh Government within two years of declaring or extending an AQMA will, in the absence of a compelling explanation, be issued with a direction from the Welsh Ministers under section 85(3) of the 1995 Act.

During 2018, monitoring for NO₂ has been increased further along Park Street, with an additional two NO₂ monitoring sites implemented. It is evident that data is also elevated at these locations and therefore will be reviewed in the 2019 APR.

In line with Welsh Governments Policy Guidance following submission and approval of the 2018 Annual Progress Report, BCBC will need to legally declare an Air Quality Management Area (AQMA) for the Park Street Area, and this will be accompanied by an appropriate technical report setting out the reasons for the declaration.

Given that a number of residential properties will be included in the boundary of AQMA, BCBC will need to engage with these residents in a formal and effective communications exercise in order that the reasons and the implications of an AQMA can be adequately explained to them and the wider community as necessary.

As part of the action plan a thorough understanding for air quality levels and trends will need to be gathered to inform any mitigation measures implemented. Therefore it is envisaged that the Ewenny Cross Roundabout automatic monitoring station will be installed in an appropriate location along Park Street which will measure NO₂ and PM₁₀. Progress has already started with the allocation of a new sampling location with site visits undertaken and acquiring a contracted service to support data handling and ratification. At the time of writing this report consultants have successfully started the data handling of data collected at Ewenny Cross Roundabout.

Following the declaration of the AQMA, the Council will have up to 24 months to formalise an Action Plan in order to implement appropriate measures to try and improve/ reduce the NO₂ levels within the AQMA. At this stage the nature of these measures is not certain but may entail some or all of the following:



References

Department for Environment, Food and Rural Affairs, 2003. *Part IV of the Environment Act 1995, Environment (Northern Ireland) Order 2002 Part III Local Air Quality Management, Technical Guidance LAQM.TG(16)*. London: DEFRA (as updated February 2018).

Welsh Government, Local Air Quality Management in Wales, Policy Guidance, June 2017.

BRIDGEND COUNTY BOROUGH COUNCIL LAQM REPORTS

- First Stage Review and Assessment of Air Quality in Bridgend County Borough, September 1999
- Second Stage Review and Assessment of Air Quality in Bridgend County Borough, December 2000
- Updating and Screening Assessment of Air Quality in Bridgend County Borough, July 2003
- Local Air Quality Management Progress Report, July 2005
- Detailed Assessment of Nitrogen Dioxide and Particles (PM₁₀), March 2006
- Updating and Screening Assessment of Air Quality in Bridgend County Borough, May 2006
- Local Air Quality Management Progress Report, August 2007
- Local Air Quality Management Progress Report, August 2008
- Updating and Screening Assessment of Air Quality in Bridgend County Borough, June 2009
- Local Air Quality Management Progress Report, June 2010**
- Detailed Assessment of Nitrogen Dioxide and Particles (PM₁₀), June 2010**
- Local Air Quality Management Progress Report, April 2011**
- Updating and Screening Assessment of Air Quality in Bridgend County Borough, May 2012
- Local Air Quality Management Progress Report, June 2013
- Local Air Quality Management Progress Report, June 2014
- Updating and Screening Assessment of Air Quality in Bridgend County Borough, May 2015
- Local Air Quality Management Progress Report, June 2016
- Local Air Quality Management Progress Report, August 2017



Appendices

Appendix A: Monthly Diffusion Tube Monitoring Results

Appendix B: A Summary of Local Air Quality Management

Appendix C: Air Quality Monitoring Data QA/QC

Appendix A: Monthly Diffusion Tube Monitoring Results

Table A.2 – Full Monthly Diffusion Tube Results for 2017

Site No	Nitrogen Dioxide Sites, Bridgend CBC	03/01/2017- 02/02/2017	02/02/2017- 03/03/2017	03/03/2017- 27/03/2017	27/03/2017- 25/04/2017	25/04/2017- 02/06/2017	02/06/2017- 29/06/2017	29/06/2017- 04/08/2017	VOID DUE TO EXPOSURE	VOID DUE TO EXPOSURE	28/09/2017 - 03/11/2017	03/11/202017 - 08/12/2017	08/12/2017 - 04/01/2018	AVERAGE SINCE JAN 17	Bias Corrected (Correction Factor 0.77)	Annualised and Bias Corrected	Disatance corrected to Façade
TONDU ROAD ROUNDABOUT																	
OBC-001A	13 Tondu Road, Bridgend	55.6	50.1	47.8	48.7	44.7	30.1	27.3			33.5	56.0	49.9	44.4	34.2	34.2	24.2
OBC-048	Tondu Road Roundabout, Bridgend	71.2	56.7	50.2	48.4	48.3	40.9	34.5			38.6	55.1	51.1	49.5	38.1	38.1	28.2
OBC-068	Bridgend United Club	41.7	32.9	35.0	38.4	36.2	23.0	17.7			26.2	44.1	40.8	33.6	25.9	25.9	25.9
OBC-069	Tondu Rd Steps	48.8	37.9	40.4		40.7	30.8	29.1					46.3	39.1	30.1	29.9	23.4
PARK STREET																	
OBC-102	4 Sunnyside	51.2	37.0	34.5	33.0	24.5	20.9	16.6			26.0		33.5	30.8	23.7	23.7	23.7
OBC-103	39 Park Street	56.7	62.5	58.6	45.5	53.8	43.6	28.3			42.0	53	43.8	48.8	37.6	37.6	37.6
OBC-104	51 Park Street	62.4	56.2	58.9	59.5	54.2	47.6	37.1			44.5	61	57.6	53.9	41.5	41.5	41.5
BRIDGEND TOWN CENTRE																	
OBC-101	Bridgend town Centre	40.5		24.0	25.2	19.5		10.0			21.0	33		24.8	19.1	18.1	18.1
NOLTON STREET / EWENNY RD CROSS LINK/ A473 COWBRIDGE ROAD																	
OBC-049	91 Nolton Street, Bridgend	61.9	41.5	36.4	37.7	36.9	21.9	11.1						35.3	27.2	27.9	27.3

OBC-050	2 Ewenny Road, Bridgend	41.4		24.1	25.7		13.4	19.3		21.7			24.3	18.7	19.0	17.8
OBC-105	65 Cowbridge Road	52.1	36.8	33.3	31.9	26.3	17.9	16.4		26.5	43.4	35.0	32.0	24.6	24.6	24.6
OBC-106	38/40 Cowbridge Road		48.6	48.2				22.4		34.8	53.1		41.4	31.9	30.4	25.2
EWENNY ROUNDABOUT																
OBC-041	55/57 Priory Avenue, Bridgend	39.5	40.2	30.3	31.1	28.5	18.4	16.2		21.2	41.6	31.9	29.9	23.0	23.0	17.7
OBC-043	Darbury, A48 Bypass, Bridgend	63.9	48.2	49.5	52.4	53.3	37.3	31.7		43.3	59.3	47.8	48.7	37.5	37.5	26.1
OBC-044	99 Ewenny Road, Bridgend	49.5	41.2	36.6	36.9	31.9	24.3	20.0		25.6	39.4	31.4	33.7	25.9	25.9	22.0
OBC-055	STL, Ewenny Road	43.0	29.0	21.8	22.0	22.1	11.5	11.0		33.1	51.9	53.8	29.9	23.0	23.0	19.2
OBC-056	Parkhof, Ewenny Road	46.6	43.4	38.1	37.5	42.0	29.5	27.9		15.1	27.1	37.8	34.5	26.6	26.6	17.1
OBC-078	Corner of Ewenny Roundabout	55.6	40.0	44.6	38.3	35.9	27.4	24.6		32.8	50.8	45.5	39.6	30.5	30.5	24.7
OBC-085	Property Façade of (Further down from Milstead)	35.1	30.8	24.7	23.5	26.7	18.1	15.6		22.5	32.1	29.5	25.9	19.9	19.9	19.9
OBC-087	Property Façade of Danbury	36.9	30.1	24.3	27.3	30.8	18.2	15.0				26.6	26.2	20.1	20.0	20.0
OBC-088	Co-location -Tube 1	42.5	35.8	28.3	26.7	32.8	17.6	15.4		12.3	29.5	23.2	26.4	20.3	20.3	20.3
OBC-089	Co-location -Tube 2	51.0	34.5	25.6	30.2	33.2	15.2	14.9		21.8	31.5	24.6	28.3	21.8	21.8	21.8
OBC-090	Co-location -Tube 3	48.8	31.4	24.3	25.2		20.3	14.9		12.2	29.5	21.3	25.3	19.5	19.5	19.5
OBC-091	Property Façade of Milstead	36.1	32.0	27.8	28.1	32.9	20.8	17.5		26.3	31.6	32.2	28.5	22.0	22.0	22.0
MAESTEG TOWN CENTRE																
OBC-080	Opposite Card Factory, Talbot Street, Maesteg	45.2	33.5	37.1		25.1	25.6					37.5	34.0	26.2	23.9	23.9
OBC-081	Opposite Maesteg Indoor Market Entrance, Talbot Street, Maesteg	45.6	35.8	38.8		26.3	23.3				42.4	41.0	36.2	27.9	21.4	21.4
OBC-082	Opposite Fluid Nightclub, Castle Street, Maesteg	51.0	32.0	37.0							36.4	41.1	39.5	30.4	23.4	23.4
OBC-083	Outside Maesteg Day Centre, Castle Street, Maesteg	50.4	40.2	43.0		36.4					41.4		42.3	32.6	25.1	25.1
COITY ROAD, BRIDGEND																
OBC-097	22 Coity Road, Bridgend	50.7	30.5	34.7	34.3	36.8	25.2	22.6		27.9	41	37.6	34.1	26.3	26.3	26.3
OBC-098	26 Coity Road, Bridgend	45.2	32.5	30.2	34.4	27.7	21.7	18.5		27.1	41	34.0	31.2	24.0	24.0	24.0
OBC-099	42 Coity Road, Bridgend	49.1	40.2	30.8	31.4	29.9	21.7	17.7		24.4	34	29.7	30.9	23.8	23.8	23.8
OBC-100	11 Coity Road, Bridgend	49.8	40.2	34.6	36.4	28.8	23.9	22.6		27.5		17.5	31.3	24.1	24.1	24.1

Notes:

Exceedances of the NO₂ annual mean objective of 40µg/m³ are shown in **bold**.

NO₂ annual means exceeding 60µg/m³, indicating a potential exceedance of the NO₂ 1-hour mean objective are shown in **bold and underlined**.

(1) See Appendix C for details on bias adjustment and annualisation.

(2) Distance corrected to nearest relevant public exposure.



Appendix B: A Summary of Local Air Quality Management

Purpose of an Annual Progress Report

This report fulfils the requirements of the Local Air Quality Management (LAQM) process as set out in the Environment Act 1995 and associated government guidance. The LAQM process places an obligation on all local authorities to regularly review and assess air quality in their areas and to determine whether or not the air quality objectives are being achieved. Where exceedances occur, or are likely to occur, the local authority must then declare an Air Quality Management Area (AQMA) and prepare a **DRAFT** Air Quality Action Plan (AQAP) within 18 months, setting out measures it intends to put in place to improve air quality in pursuit of the air quality objectives. The AQAP must be **formally** adopted prior to 24 months has elapsed. Action plans should then be reviewed and updated where necessary at least every 5 years.

For Local Authorities in Wales, an Annual Progress Report replaces all other formal reporting requirements and have a very clear purpose of updating the general public on air quality, including what ongoing actions are being taken locally to improve it if necessary.

Air Quality Objectives

The air quality objectives applicable to LAQM in Wales are set out in the Air Quality (Wales) Regulations 2000, No. 1940 (Wales 138), Air Quality (Amendment) (Wales) Regulations 2002, No 3182 (Wales 298), and are shown in **Table B.2**.

The table shows the objectives in units of microgrammes per cubic metre $\mu\text{g}/\text{m}^3$ (milligrammes per cubic metre, mg/m^3 for carbon monoxide) with the number of exceedances in each year that are permitted (where applicable).

Table B.2 – Air Quality Objectives Included in Regulations for the Purpose of LAQM in Wales

Pollutant	Air Quality Objective		Date to be achieved by
	Concentration	Measured as	
Nitrogen Dioxide (NO ₂)	200µg/m ³ not to be exceeded more than 18 times a year	1-hour mean	31.12.2005
	40µg/m ³	Annual mean	31.12.2005
Particulate Matter (PM ₁₀)	50µg/m ³ , not to be exceeded more than 7 times a year	24-hour mean	31.12.2010
	18µg/m ³	Annual mean	31.12.2010
Particulate Matter (PM _{2.5})	10µg/m ³	Annual mean	31.12.2020
Sulphur dioxide (SO ₂)	350µg/m ³ , not to be exceeded more than 24 times a year	1-hour mean	31.12.2004
	125µg/m ³ , not to be exceeded more than 3 times a year	24-hour mean	31.12.2004
	266µg/m ³ , not to be exceeded more than 35 times a year	15-minute mean	31.12.2005
Benzene	3.25µg/m ³	Running annual mean	31.12.2010
1,3 Butadiene	2.25µg/m ³	Running annual mean	31.12.2003
Carbon Monoxide	10.0mg/m ³	Running 8-Hour mean	31.12.2003
Lead	0.25µg/m ³	Annual Mean	31.12.2008

Appendix C: Air Quality Monitoring Data QA/QC

Diffusion Tube Bias Adjustment Factors

A database of bias adjustment factors determined from Local Authority co-location studies throughout the UK has been collated by the LAQM Helpdesk. The National Diffusion Tube Bias Adjustment Factor Spreadsheet (Version 06/18) was used to obtain an overall adjustment factor of 0.77 from the input data shown in the following screen shot. This overall factor is based on 29 co-location studies where the tube preparation method and analysis laboratory used were the same as those used by BCBC.

Figure C.1: National Diffusion Tube Bias Adjustment Factor Spreadsheet

National Diffusion Tube Bias Adjustment Factor Spreadsheet							Spreadsheet Version Number: 06/18				
Follow the steps below in the correct order to show the results of relevant co-location studies							This spreadsheet will be updated at the end of September 2018 LAQM Helpdesk Website				
Data only apply to tubes exposed monthly and are not suitable for correcting individual short-term monitoring periods											
Whenever presenting adjusted data, you should state the adjustment factor used and the version of the spreadsheet											
This spreadsheet will be updated every few months; the factors may therefore be subject to change. This should not discourage their immediate use.											
The LAQM Helpdesk is operated on behalf of Defra and the Devolved Administrations by Bureau Veritas, in conjunction with contract partners AECOM and the National Physical Laboratory.							Spreadsheet maintained by the National Physical Laboratory. Original compiled by Air Quality Consultants Ltd.				
Step 1:		Step 2:		Step 3:		Step 4:					
Select the Laboratory that Analyses Your Tubes from the Drop-Down List		Select a Preparation Method from the Drop-Down List		Select a Year from the Drop-Down List		Where there is only one study for a chosen combination, you should use the adjustment factor shown with caution. Where there is more than one study, use the overall factor ² shown in blue at the foot of the final column.					
If a laboratory is not shown, we have no data for this laboratory.		If a preparation method is not shown, we have no data for this method at this laboratory.		If a year is not shown, we have no data.		If you have your own co-location study then see footnote ⁴ . If uncertain what to do then contact the Local Air Quality Management Helpdesk at LAQMHelpdesk@uk.bureauveritas.com or 0800 0327953					
Analysed By ¹	Method ² <small>To do your selection, choose 50% from the pop-up list</small>	Year ³ <small>To do your selection, choose (Any)</small>	Site Type	Local Authority	Length of Study (months)	Diffusion Tube Mean Conc. (Dm) (µg/m ³)	Automatic Monitor Mean Conc. (Cm) (µg/m ³)	Bias (B)	Tube Precision ⁵	Bias Adjustment Factor (A) (Cm/Dm)	
ESG Didcot	50% TEA in acetone	2017	R	Tunbridge Wells	12	56	40	38.2%	G	0.72	
ESG Didcot	50% TEA in acetone	2017	UB	Kingston upon Hull City Council	12	32	23	38.2%	G	0.72	
ESG Didcot	50% TEA in acetone	2017	UB	Kingston upon Hull City Council	12	32	23	38.2%	G	0.72	
ESG Didcot	50% TEA in acetone	2017	R	Suffolk Coastal DC	12	45	37	23.8%	G	0.81	
ESG Didcot	50% TEA in acetone	2017	R	Dacorum Borough Council	9	31	27	14.7%	G	0.87	
ESG Didcot	50% TEA in acetone	2017	R	North East Lincolnshire Council	11	37	24	53.5%	G	0.65	
ESG Didcot	50% TEA in acetone	2017	UB	Swansea Council	10	17	14	23.4%	G	0.81	
ESG Didcot	50% TEA in acetone	2017	R	Swansea Council	12	33	24	34.5%	G	0.74	
ESG Didcot	50% TEA in acetone	2017	Overall Factor² (29 studies)						Use	0.77	

Discussion of Choice of Factor to use

The bias adjustment factor applied to all 2017 data is 0.77. The applied bias adjustment factor has been calculated using the national diffusion tube bias adjustment factor spreadsheet version 06/18. The individual bias adjustment factor calculated using Ewenny Cross Roundabout automatic monitoring system and the co-located triplicate diffusion tubes has not been used due to technical & quality issues. As previously stated calibrations for roadside/ kerbside located monitors should be undertaken **every two weeks** by LAs. Unfortunately due to staffing requirements this was not adhered to. As a best practise approach, due to the inconsistency of LA Calibrations a nitrogen dioxide (NO₂) co-location study was not undertaken and alternatively a national bias adjustment factor was obtained and applied from the Defra website, based on an average of 29 co-location studies.

Short-Term to Long-Term Data Adjustment

AMS Adjustment

The Ewenny Cross Roundabout AMS had poor annual data capture for nitrogen dioxide (NO₂) (27%). As a result, the NO₂ data presented in this report from this monitor has been annualised according to the methods presented in Box 7.9 of LAQM TG(16). Two long-term AURN urban background continuous monitoring sites, within a distance of approximately 50 miles from Bridgend were selected, Cwmbran and Bristol St Paul's.

Table C.1 – Long term AURN sites used for calculation of NO₂ annualisation ratio for Ewenny Cross Roundabout AMS

Site	Site Type	Annual Mean (µg/m ³)	Period Mean (µg/m ³)	Ratio
Cwmbran AURN	Urban Background	12.04	17.19	0.70
Bristol St Paul's AURN	Urban Background	23.79	32.70	0.73
Average Ratio				0.71

Diffusion Tubes Adjustment

The Nitrogen Dioxide (NO₂) obtained via the use of passive diffusion tubes during January to December 2017 were annualised via the method described in Box 7.10 of LAQM TG(16). Due to potential quality issues surrounding Ewenny Roundabout's AMS NO₂ data, three long-term AURN urban background continuous monitoring sites, within a distance of approximately 50 miles from Bridgend were selected, Cardiff, Cwmbran and Bristol St Paul's.

Table C.2 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-069

Site	Site Type	Annual Mean (µg/m ³)	Period Mean (µg/m ³)	Ratio
Cwmbran AURN	Urban Background	12.02	12.5	0.96
Bristol St Paul's AURN	Urban Background	23.68	24.17	0.98
Cardiff City Centre AURN	Urban Background	20.60	19.80	1.04
Average Ratio				0.99

Table C.3 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-101

Site	Site Type	Annual Mean (µg/m ³)	Period Mean (µg/m ³)	Ratio
Cwmbran AURN	Urban Background	12.02	12.70	0.95
Bristol St Paul's AURN	Urban Background	23.68	25.27	0.94
Cardiff City Centre AURN	Urban Background	20.60	22.23	0.93

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Average Ratio				0.94

Table C.4 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-049

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	11.76	1.02
Bristol St Paul's AURN	Urban Background	23.68	23.16	1.02
Cardiff City Centre AURN	Urban Background	20.60	20.09	1.03
Average Ratio				1.02

Table C.5 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-050

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	11.87	1.01
Bristol St Paul's AURN	Urban Background	23.68	23.27	1.02
Cardiff City Centre AURN	Urban Background	20.60	20.08	1.03
Average Ratio				1.02

Table C.6 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-106

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	12.26	0.98
Bristol St Paul's AURN	Urban Background	23.68	24.88	0.95
Cardiff City Centre AURN	Urban Background	20.60	22.32	0.92
Average Ratio				0.95

Table C.7 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-087

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	12.31	0.98
Bristol St Paul's AURN	Urban Background	23.68	23.63	1.00
Cardiff City Centre AURN	Urban Background	20.60	20.70	1.00
Average Ratio				0.92

Table C.8 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-080

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	13.68	0.88
Bristol St Paul's AURN	Urban Background	23.68	25.77	0.92
Cardiff City Centre AURN	Urban Background	20.60	22.02	0.94
Average Ratio				0.91

Table C.9 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-081

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	14.06	0.85
Bristol St Paul's AURN	Urban Background	23.68	26.93	0.88
Cardiff City Centre AURN	Urban Background	20.60	23.03	0.89
Average Ratio				0.88

Table C.10 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-082

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	16.88	0.71
Bristol St Paul's AURN	Urban Background	23.68	31.86	0.74
Cardiff City Centre AURN	Urban Background	20.60	25.96	0.79
Average Ratio				0.75

Table C.11 – Long term AURN sites used for calculation of nitrogen dioxide annualisation ratio for Diffusion Tube OBC-083

Site	Site Type	Annual Mean ($\mu\text{g}/\text{m}^3$)	Period Mean ($\mu\text{g}/\text{m}^3$)	Ratio
Cwmbran AURN	Urban Background	12.02	15.18	0.79
Bristol St Paul's AURN	Urban Background	23.68	29.74	0.80
Cardiff City Centre AURN	Urban Background	20.60	24.70	0.83
Average Ratio				0.81

QA/QC of Diffusion Tube Monitoring

The diffusion tubes are supplied and analysed by Environmental Scientifics Group Didcot, using the 50% triethanolamine (TEA) in water method. Environmental Scientifics Group Didcot participates in the Annual Field Inter-Comparison Exercise and Workplace Analysis Scheme for Proficiency (WASP) inter-comparison scheme for nitrogen dioxide diffusion tube analysis. From April 2014 the WASP Scheme was combined with the STACKS scheme to form the new AIR scheme, which Environmental Scientifics Group participates in. The AIR scheme is an independent analytical proficiency testing scheme operated by LGC Standards and supported by the Health and Safety Laboratory (HSL).

The laboratory Environmental Scientifics Group Didcot is regarded ranked as the highest rank of satisfactory in relation to the WASP intercomparison scheme for spiked Nitrogen Dioxide diffusion tubes. Information regarding tube precision can be obtained via <http://laqm.defra.gov.uk/diffusion-tubes/precision.html> Information regarding WASP results can be obtained via <http://laqm.defra.gov.uk/diffusion-tubes/qa-qc-framework.html>

Glossary of Terms

Abbreviation	Description
AQAP	Air Quality Action Plan - A detailed description of measures, outcomes, achievement dates and implementation methods, showing how the LA intends to achieve air quality limit values'
AQMA	Air Quality Management Area – An area where air pollutant concentrations exceed / are likely to exceed the relevant air quality objectives. AQMAs are declared for specific pollutants and objectives
APR	Air quality Annual Progress Report
AURN	Automatic Urban and Rural Network (UK air quality monitoring network)
BCBC	Bridgend County Borough Council
Defra	Department for Environment, Food and Rural Affairs
DMRB	Design Manual for Roads and Bridges – Air quality screening tool produced by Highways England
FDMS	Filter Dynamics Measurement System
LAQM	Local Air Quality Management
NO ₂	Nitrogen Dioxide
NO _x	Nitrogen Oxides
PM ₁₀	Airborne particulate matter with an aerodynamic diameter of 10µm (micrometres or microns) or less
PM _{2.5}	Airborne particulate matter with an aerodynamic diameter of 2.5µm or less
QA/QC	Quality Assurance and Quality Control
SO ₂	Sulphur Dioxide