


- ### Notes
1. Topsoil (minimum consolidated depths 150mm & 200mm as shown) to be cultivated and graded, all stones and other materials over 40mm and all weed growth to be removed.
 2. Before final cultivation a pre-seeding slow release granular fertiliser (British Seed Houses BSH1 or similar to approval) is to be spread evenly at the rate of 70g/m². Topsoil to receive a final cultivation before seeding to ensure that the seed bed is reduced to a clean, fine, firm tilth.
 3. Grass seed mixture to be British Seed Houses BSH A3 (Landscape and Embankment Mix) or similar to approval, to be applied evenly at the rate of 35g/m² in good contact with the root zone. Grass seed must be sown when conditions are suitable for successful germination and establishment of the grass sward. Once the grass is 75mm high, any debris, litter or stones over 30mm shall be removed.
 4. The grass shall receive a first cut to a height of 40mm using a rotary mower approved by the Employer. The Contractor shall make good any grass areas that have failed to thrive by recultivating and reseeding at a time to be approved by the Employer.
 5. Unless stated otherwise in the Contract, all kerbs, channel, edgings and quadrants shall comply with BS 7263-3-2001 and Clause 1101 of the Specification for Highway Works and Appendix 11/1 to the Specification.

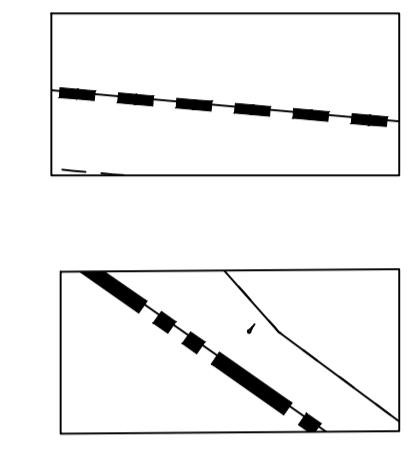

ACO KerbDain 305 Kompact System, laid to manufacturers details including rodding access, drop kerb, flush centre stone, gully and all other units as specified. System to also include endcap units as required and 150mm thick, bedding, backing and haunch to front.

ACO KerbDain 480 Kapacity System, laid to manufacturers details including rodding access, gully and all other units as specified. System to also include endcap units as required and 150mm thick, bedding, backing and haunch to front.

REV:	DESCRIPTION:	BY:	DATE:
A	Removal of Water Main Duct and Insertion of MDPE water main pipe for future Tap Positions	RSH	Sept 2016

BRIDGEND
County Borough Council
Civic Offices, Angel Street
Bridgend
EXECUTIVE DIRECTOR - COMMUNITIES

**TRANSPORTATION
AND ENGINEERING**

project	COYCHURCH CREMATORIUM EXTENSION ACCESS ROAD PHASE 2		
title	GENERAL ARRANGEMENT		
scale	1:250	drawn	RSH date Sept'16
	original drawing A1	checked	date
job no.	SVF550067	approved	date
		drawing no.	001
		revision	A